

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

# XM 20 JC

## COMPACT INDUSTRIAL VACUUM CLEANER



Watch the video!



**POWER**  
2,6 kW - 3,5 HP



**APPLICATION**  
Fine, dry and clogging  
powders



**CAPACITY**  
20Lt

## FEATURES

- High filtration capacity and efficiency
- Compact and handy
- Sturdy painted steel construction
- Multiple construction options available

## HIGHLIGHTS




### SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



### FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

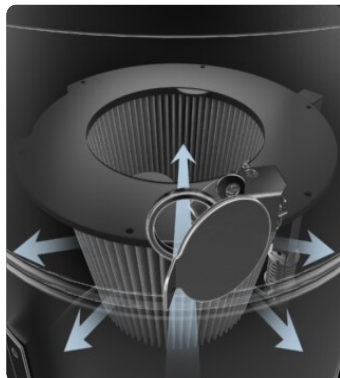

### JET CLEAN FILTER CLEANING SYSTEM

Equipped with JetClean® filter cleaning system. Due to the different pressure between the outside and inside of the vacuum cleaner, the system generates a flow of air through the cartridge that detaches dust from the surface of the filter, keeping the filter efficient while working and without stopping suction.



### COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

## TECHNICAL DATA

### MOTOR

Typologies	By-pass
Power	2,6 kW - 3,5 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	380 m3/h
Noise level	72 dB(A)

### MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	20 Lt
Dimensions	516 x 545 mm
Height	994 mm
Weight	38 Kg

### FILTRATION

Primary filter type	Cartridge
Filter surface	35000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Jet Clean
JetClean Guillotine	Included

## FEATURES



### **FILTER CLOGGING INDICATOR**


Filter clogged or need to be replaced  
indicator light



### **POWER SUPPLY CABLE**



### **SHUKO TYPE PLUG**



### **DEFLECTOR**

Internal deflector to protect the filter



### **WHEEL WITH BRAKE**

Non-marking wheel with integrated brake



### **WHEELS**

Non-marking pivoting wheels



### **STEEL CONSTRUCTION**

Rugged industrial coated steel construction



### **SD**

Sliding damper



### **JC**

Jet Clean

## OPTIONS

### AVAILABLE FILTER MEDIA



#### HEPA 13

Absolute filter (EN 1822)  
35.000 cm² filter surface  
H13 Class Filter (EN 1822)  
Glass fiber



#### HEPA 14

Absolute filter (EN 1822)  
22.000 cm² filter surface  
H14 Class Filter (EN 1822)  
Glass fiber

### STRUCTURE AND OPTIONS

**60<sup>Hz</sup>**

#### 60HZ

Available in 60Hz version



#### 3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



#### RC SCHUKO

Remote control by power tool (MAX 2000 W)



#### GRD

Grounding



#### BX

Stainless steel bin AISI 304

## ACCESSORIES



### P13638

#### STARTER KIT Ø 40MM

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



### P13640

#### DRY KIT Ø 40MM

Kit containing specific accessories for 40 mm diameter dust and solids vacuuming