

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

XM 20

PORTABLE INDUSTRIAL VACUUM CLEANER



Watch the video!



POWER
2,6 kW - 3,5 HP



APPLICATION
Powders, solids and shavings



CAPACITY
20 Lt

FEATURES


- Compact and maneuverable
- High filtration capacity and efficiency
- Sturdy painted steel construction
- Multiple construction options available

HIGHLIGHTS



SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.

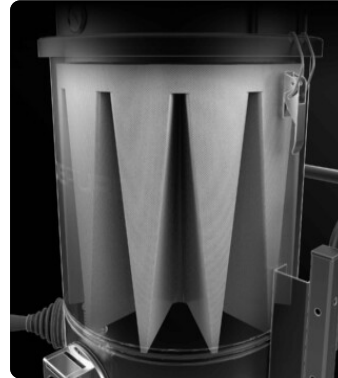

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTOR

| | |
|--------------------------|-----------------|
| Typologies | By-pass |
| Power | 2,6 kW - 3,5 HP |
| Frequency | 50/60 Hz |
| Voltage | 230 V |
| Vacuum in continuous run | 250 mBar |
| Maximum air flow | 380 m3/h |
| Noise level | 72 dB(A) |

MACHINE

| | |
|-------------------|-----------------|
| Suction inlet | 50 Ø mm |
| Collection system | Steel container |
| Capacity | 20 Lt |
| Dimensions | 516 x 545 mm |
| Height | 994 mm |
| Weight | 38 Kg |

FILTRATION

| | |
|------------------------|-----------|
| Primary filter type | Star |
| Filter surface | 15000 cm2 |
| Media | Polyester |
| Filter Cleaning System | Manual |

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



ANT M
Antistatic filter (M class EN 60335-2-69)



MTF
Teflon filter (M class EN 60335-2-69)



NOMEX
250° Celsius resistant filter



PTFE
PTFE Filter (M class EN 60335-2-69)



PTFE ANT
Antistatic PTFE filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



ACCESSORY HOLDER



BX
Stainless steel bin AISI 304



GX
Stainless steel bin and chamber AISI 304



GRD
Grounding



RC SCHUKO
Remote control by power tool (MAX 2000 W)

ACCESSORIES



P12350
STARTER KIT Ø 50MM

A compact, essential solution for quick vacuuming on simple surfaces. - 3-meter Evaflex hose - 2 antistatic rubber sleeves - Flat nozzle



P11887
WET & DRY KIT Ø 50MM

Robust system for suctioning large quantities of liquids and solid debris. - 3-meter Evaflex hose - 2x antistatic rubber sleeves - Flat ...