

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

M 100 Powerful Industrial Vacuum



Watch the video!






FEATURES

- Powerful and reliable steel industrial vacuum cleaner
- Specific filters for materials with different characteristics
- Ability to vacuum dust, solids and liquids
- Multiple construction options available

HIGHLIGHTS



SUCTION UNIT

Suction is provided by 3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside a coated container complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	3,9 kW - 5,2 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	570 m3/h
Noise level	72 dB(A)

MACHINE


Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	100 Lt
Dimensions	660 x 800 mm
Height	1515 mm
Weight	80 Kg

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	М
Media	Polyester
Filter Cleaning System	Manual



FEATURES

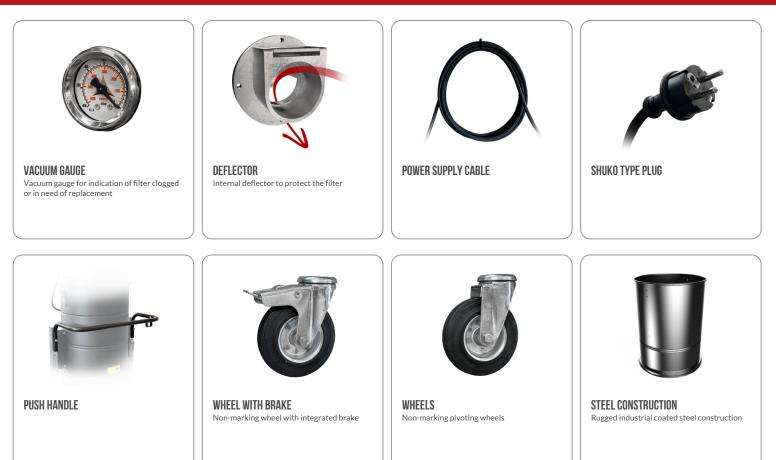

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP Automatic reverse jet cleaning system Antistatic M class filter (EN 60335-2-69), 3 Polyester filter cartridges, 9 m² filter surface



COM Compressor on board Compressor fitted on the back cover



AVAILABLE FILTER MEDIA



PTFE ANT Antistatlc PTFE filter (M class EN 60335-2-69)



PTFE PTFE Filter (M class EN 60335-2-69)



NOMEX 250° Celsius resistant filter



MTF Teflon filter (M class EN 60335-2-69)




ANT M Antistatic filter (M class EN 60335-2-69)



HEPA 14 Absolute filter (EN 1822) 28.000 cm² filter surface H14 Class Filter (EN 1822) Glass fiber



STRUCTURE AND OPTIONS

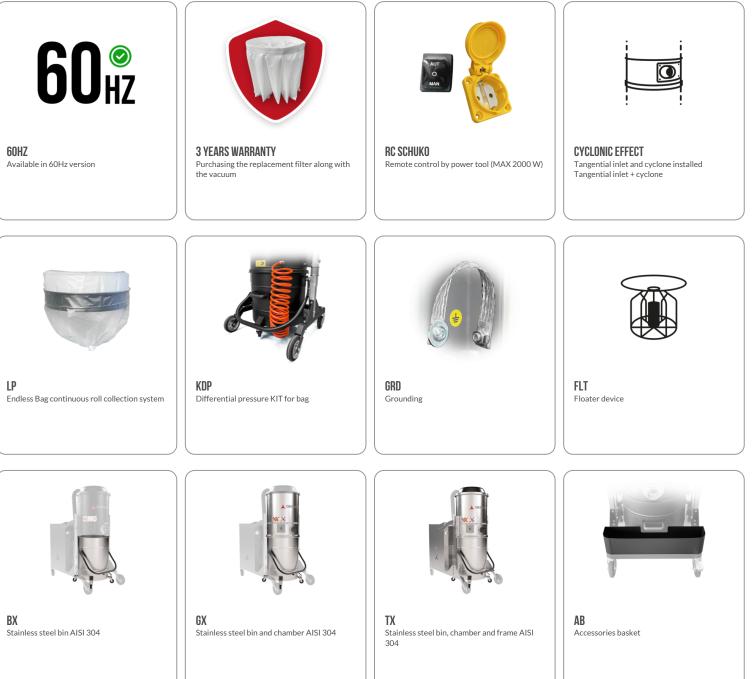



CONTAINER EMPTYING KIT System for easy container emptying using forklift lifting.



ACCESSORIES



P13970 ARTICULATED SUCTION ARM D70 Flexible PVC suction arm, retrofittable on existing models - 1.2 mt length - d70



P13640 DRY KIT Ø 40MM Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



P12348 DRY KIT Ø 50MM Kit containing specific accessories for 50 mm diameter dust and solids vacuuming



P13638 STARTER KIT Ø 40MM Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P12350 STARTER KIT Ø 50MM Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P13639 WET & DRY KIT Ø 40MM Kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P11887 WET & DRY KIT Ø 50MM Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming