

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

WD 133

INDUSTRIAL VACUUM CLEANER FOR LIQUIDS



POWER
3,9 kW - 5,2 HP



APPLICATION
Liquids




CAPACITY
130Lt

FEATURES

- 130 liters of liquid collection capacity
- High-strength steel construction
- Dual of interchangeable liquid/solid filtration system
- Manual valve for effortless discharge of sucked-in liquid

HIGHLIGHTS

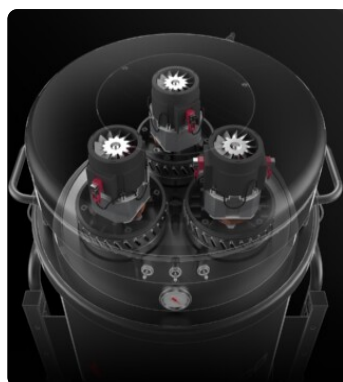

SUCTION UNIT

Suction is provided by 2/3 by-pass motors operated by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



DUST/LIQUID FILTRATION KIT

Supplied with two washable filters, one polypropylene for liquid suction and one polyester for dust suction.



COLLECTION UNIT

The material is collected inside a large coated steel container that is easy to move thanks to the 4 sturdy wheels.



LIQUID DISCHARGE VALVE

A ball valve located at the bottom of the container allows the collected liquids to be easily discharged by gravity.

TECHNICAL DATA

MOTOR

| | |
|--------------------------|-----------------|
| Typologies | By-pass |
| Power | 3,9 kW - 5,2 HP |
| Frequency | 50/60 Hz |
| Voltage | 230 V |
| Vacuum in continuous run | 250 mBar |
| Maximum air flow | 570 m3/h |
| Noise level | 72 dB(A) |

MACHINE

| | |
|-------------------------|-----------------|
| Suction inlet | 70 Ø mm |
| Collection system | Steel container |
| Capacity | 130 Lt |
| Liquid discharge system | Discharge valve |
| Dimensions | 580 x 530 mm |
| Height | 1160 mm |
| Weight | 40 Kg |


FILTRATION

| | |
|---------------------|---------------------|
| Primary filter type | Bag |
| Media | Polypropylene 150µm |
| Additional filter | Anti-foam filter |

FEATURES



LIQUID LEVEL INDICATOR



DEFLECTOR

Internal deflector to protect the filter



PUSH HANDLE



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



SHUKO TYPE PLUG



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction

OPTIONS

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



BX
Stainless steel bin AISI 304



GRD
Grounding

ACCESSORIES



P11887
WET & DRY KIT Ø 50MM
Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P13639
WET & DRY KIT Ø 40MM
Kit containing specific accessories for 40 mm diameter solids and liquids vacuuming