

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

WD 132 P

INDUSTRIAL VACUUM CLEANER FOR LIQUIDS WITH SIMULTANEOUS DISCHARGE PUMP



POWER
2,6 kW - 3,5 HP



APPLICATION
Liquids




CAPACITY
130 Lt

FEATURES

- 130 liters of liquid collection capacity
- Simultaneous suction, filtration and liquid discharge
- Dual of interchangeable liquid/solid filtration system
- High-strength steel construction

HIGHLIGHTS

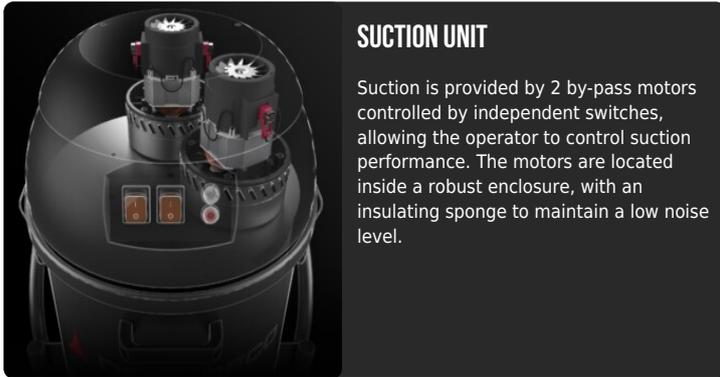


SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.




DUST/LIQUID FILTRATION KIT

Supplied with two washable filters, one polypropylene for liquid suction and one polyester for dust suction.

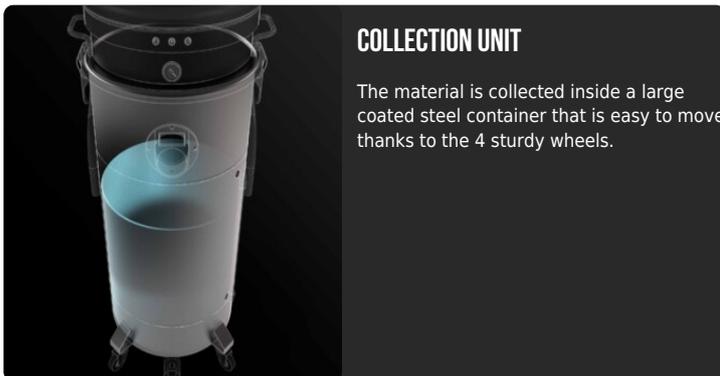

COLLECTION UNIT

The material is collected inside a large coated steel container that is easy to move thanks to the 4 sturdy wheels.

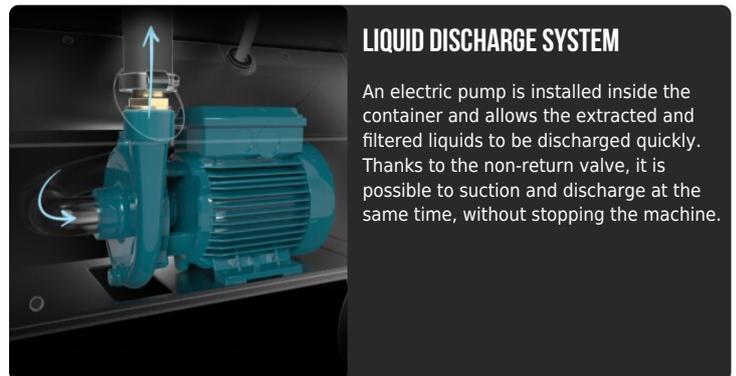

LIQUID DISCHARGE SYSTEM

An electric pump is installed inside the container and allows the extracted and filtered liquids to be discharged quickly. Thanks to the non-return valve, it is possible to suction and discharge at the same time, without stopping the machine.

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	2,6 kW - 3,5 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	380 m ³ /h
Noise level	72 dB(A)

MACHINE

Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	130 Lt
Liquid discharge system	Discharge pump
Liquid discharge rate	135 Lt/min
Dimensions	580 x 530 mm
Height	1160 mm
Weight	47 Kg

FILTRATION

Primary filter type	Bag
Media	Polypropylene 150µm
Additional filter	Anti-foam filter

FEATURES



LIQUID LEVEL INDICATOR



PUSH HANDLE



SHUKO TYPE PLUG



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



HOSE HOOK



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



PUMP

Continuous discharge pump

OPTIONS

STRUCTURE AND OPTIONS



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum

60  **HZ**

60HZ

Available in 60Hz version



BX

Stainless steel bin AISI 304



GRD

Grounding

ACCESSORIES



P12350

STARTER KIT Ø 50MM

Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P11887

WET & DRY KIT Ø 50MM

Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming