SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

WD 132 P

INDUSTRIAL VACUUM CLEANER FOR LIQUIDS WITH SIMULTANEOUS DISCHARGE PUMP



POWER
2,6 kW - 3,5 HP


APPLICATION
Liquids

CAPACITY
130 Lt

FEATURES

- 130 liters of liquid collection capacity
- Dual of interchangeable liquid/solid filtration system
- Simultaneous suction, filtration and liquid discharge
- High-strength steel construction

HIGHLIGHTS

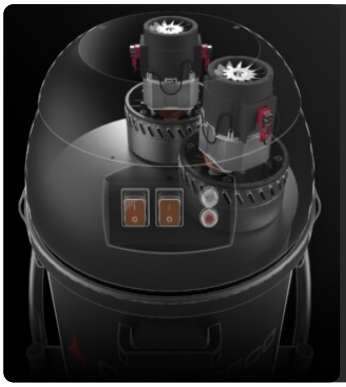

SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.




DUST/LIQUID FILTRATION KIT

Supplied with two washable filters, one polypropylene for liquid suction and one polyester for dust suction.



COLLECTION UNIT

The material is collected inside a large coated steel container that is easy to move thanks to the 4 sturdy wheels.

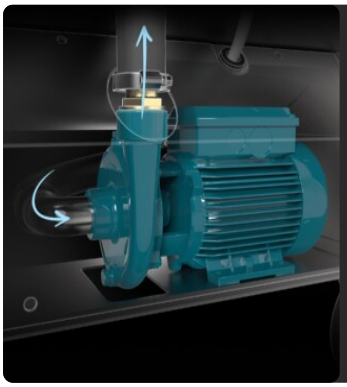

LIQUID DISCHARGE SYSTEM

An electric pump is installed inside the container and allows the extracted and filtered liquids to be discharged quickly. Thanks to the non-return valve, it is possible to suction and discharge at the same time, without stopping the machine.

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	2,6 kW - 3,5 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	380 m3/h
Noise level	72 dB(A)

MACHINE

Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	130 Lt
Liquid discharge system	Discharge pump
Liquid discharge rate	135 Lt/min
Dimensions	580 x 530 mm
Height	1160 mm
Weight	47 Kg

FILTRATION

Primary filter type	Bag
Media	Polypropylene 150 m
Additional filter	Anti-foam filter

FEATURES



LIQUID LEVEL INDICATOR



PUSH HANDLE



SHUKO TYPE PLUG



VACUUM GAUGE
Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



HOSE HOOK



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction



PUMP
Continuous discharge pump

OPTIONS

STRUCTURE AND OPTIONS




3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



60HZ
Available in 60Hz version



BX
Stainless steel bin AISI 304



GRD
Grounding

ACCESSORIES



P12350
STARTER KIT Ø 50MM
A compact, essential solution for quick vacuuming on simple surfaces. - 3-meter Evaflex hose - 2 antistatic rubber sleeves - Flat nozzle



P11887
WET & DRY KIT Ø 50MM
Robust system for suctioning large quantities of liquids and solid debris. - 3-meter Evaflex hose - 2x antistatic rubber sleeves - Flat ...