

DUST EXTRACTORS FOR TOXIC AND HAZARDOUS DUSTS

XFLOOR 3 INDUSTRIAL VACUUM CLEANER FOR SURFACE TREATMENT





FEATURES

- Industrial vacuum cleaner for fine dust
- Large surface area filter of class M

- Tangential inlet with cyclonic effect
- Endless Bag collection to avoid contact with dust

HIGHLIGHTS



SUCTION UNIT

Suction is provided by 3 by-pass motors controlled by a single switch that allows them to start sequentially, avoiding current spikes. The motors are inside a sturdy enclosure, with an insulating sponge to maintain a low noise level.

FILTER UNIT

The tangential inlet facilitates the cyclonic effect to deposit the collected material in the container. Filtration is ensured by a polyester star filter in class M (filtering efficiency 1 micron) with high filtering surface area, which guarantees air passage even with a dirty filter.



of the filter.

FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows

the filter to be cleaned easily and quickly,

removing dust and debris from the surface

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	3,9 kW - 5,2 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	570 m3/h
Noise level	72 dB(A)

MACHINE


Suction inlet	80 Ø mm
Collection system	Endless Bag
Dimensions	920 x 565 mm
Height	1430 mm
Compact height	1170 mm
Weight	70 Kg

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	М
Media	Polyester
Filter Cleaning System	Manual



FEATURES

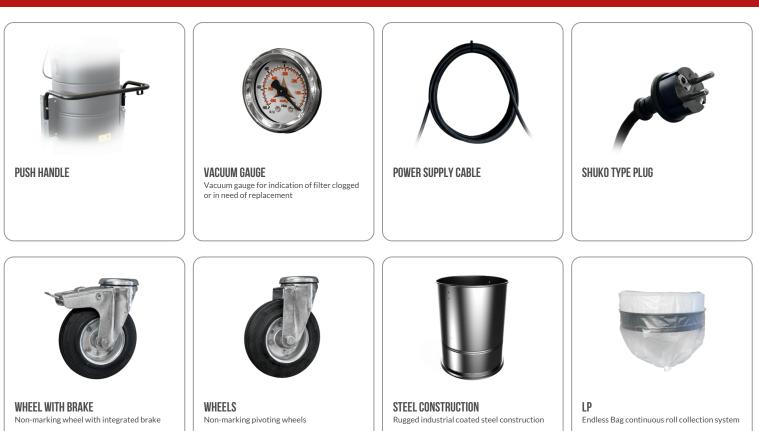

OPTIONS

AVAILABLE FILTER MEDIA



PTFE ANT Antistatlc PTFE filter (M class EN 60335-2-69)



PTFE PTFE Filter (M class EN 60335-2-69)



MTF Teflon filter (M class EN 60335-2-69)



ANT M Antistatic filter (M class EN 60335-2-69)



STRUCTURE AND OPTIONS



60HZ Available in 60Hz version



3 YEARS WARRANTY Purchasing the replacement filter along with the vacuum



TELESCOPIC CHASSIS To reduce the footprint and facilitate transportation



RC SCHUKO Remote control by power tool (MAX 2000 W)



ACCESSORIES



P12350 STARTER KIT Ø 50MM Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



P12348 DRY KIT Ø 50MM Kit containing specific accessories for 50 mm diameter dust and solids vacuuming



P13640 DRY KIT Ø 40MM Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



P13638 STARTER KIT Ø 40MM Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming