

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

# XM 35 JC LP

## INDUSTRIAL VACUUM FOR SURFACE PREPARATION



Watch the video!



**POWER**  
2,6 kW - 3,5 HP



**APPLICATION**  
Toxic or hazardous dusts



**COLLECTION SYSTEM**  
Endless bag

## FEATURES

- Designed for fine dust extraction
- Compact and easy to handle
- Large surface area M-class filter with integrated Jet Clean cleaning
- Endless Bag collection to avoid contact with dust

## HIGHLIGHTS




### SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



### FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

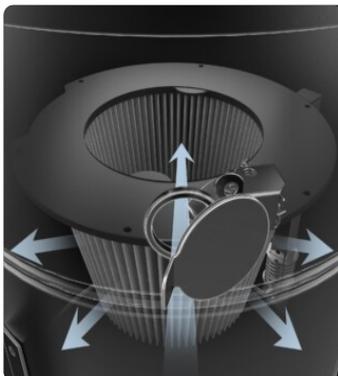

### JET CLEAN FILTER CLEANING SYSTEM

Equipped with JetClean® filter cleaning system. Due to the different pressure between the outside and inside of the vacuum cleaner, the system generates a flow of air through the cartridge that detaches dust from the surface of the filter, keeping the filter efficient while working and without stopping suction.



### COLLECTION UNIT

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.

## TECHNICAL DATA

### MOTOR

|                          |                 |
|--------------------------|-----------------|
| Typologies               | By-pass         |
| Power                    | 2,6 kW - 3,5 HP |
| Frequency                | 50/60 Hz        |
| Voltage                  | 230 V           |
| Vacuum in continuous run | 250 mBar        |
| Maximum air flow         | 380 m3/h        |
| Noise level              | 72 dB(A)        |

### MACHINE

|                   |              |
|-------------------|--------------|
| Suction inlet     | 50 Ø mm      |
| Collection system | Endless Bag  |
| Dimensions        | 585 x 545 mm |
| Height            | 1395 mm      |
| Weight            | 45 Kg        |

### FILTRATION

|                                |                       |
|--------------------------------|-----------------------|
| Primary filter type            | Cartridge             |
| Filter surface                 | 16000 cm2             |
| EN 60335-2-69 filtration class | M                     |
| Media                          | PTFE coated polyester |
| Filter Cleaning System         | Jet Clean             |
| JetClean Guillotine            | Included              |

OPTIONS

AVAILABLE FILTER MEDIA



**HEPA 14**  
Absolute filter (EN 1822)  
22.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber



**HEPA 13**  
Absolute filter (EN 1822)  
35.000 cm<sup>2</sup> filter surface  
H13 Class Filter (EN 1822)  
Glass fiber

STRUCTURE AND OPTIONS



**60HZ**  
Available in 60Hz version



**3 YEARS WARRANTY**  
Purchasing the replacement filter along with  
the vacuum



**AB**  
Accessories basket



**RC SCHUKO**  
Remote control by power tool (MAX 2000 W)



**GRD**  
Grounding

ACCESSORIES



**P12350**  
**STARTER KIT Ø 50MM**  
Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming



**P12348**  
**DRY KIT Ø 50MM**  
Kit containing specific accessories for 50 mm diameter dust and solids vacuuming



**P13640**  
**DRY KIT Ø 40MM**  
Kit containing specific accessories for 40 mm diameter dust and solids vacuuming



**P13638**  
**STARTER KIT Ø 40MM**  
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming