

HIGH-POWER THREE-PHASE INDUSTRIAL VACUUM CLEANERS

ATLAS 30 ROOTS

HIGH VACUUM INDUSTRIAL VACUUM CLEANER FOR HANDLING LARGE QUANTITIES OF MATERIAL



Watch the video!



POWER
22 kW - 30 HP



APPLICATION
Powders, solids and
shavings




COLLECTION SYSTEM
Localized Discharge

FEATURES

- Simple, fast and safe handling of the vacuumed material
- Hopper can be lifted to facilitate material discharge
- Maximum filtration and automatic cleaning of filter cartridges
- Possibility of installation on trailer

HIGHLIGHTS

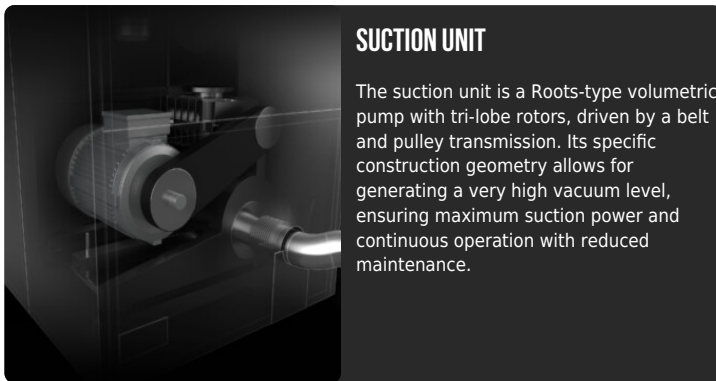


SUCTION UNIT

The suction unit is a Roots-type volumetric pump with tri-lobe rotors, driven by a belt and pulley transmission. Its specific construction geometry allows for generating a very high vacuum level, ensuring maximum suction power and continuous operation with reduced maintenance.



FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.

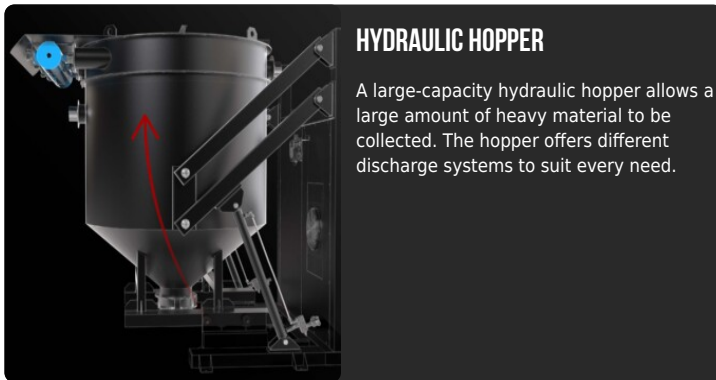

HYDRAULIC HOPPER

A large-capacity hydraulic hopper allows a large amount of heavy material to be collected. The hopper offers different discharge systems to suit every need.



TRAILER INSTALLATION READY

The vacuum cleaner can be transported anywhere by installing the unit on a trailer. *trailer not included.

TECHNICAL DATA

MOTOR

Typologies	Roots pump
Power	22 kW - 30 HP
Frequency	50/60 Hz
Voltage	400 V
Maximum vacuum mmH2O	5000 mmH2O
Maximum air flow	1500 m3/h
Insulation class	55 F IP
Noise level	88 dB(A)
Remote control	Included
Electrical panel	Included

MACHINE

Suction inlet	130 Ø mm
Collection system	Conveyed discharge
Dimensions	3746 x 1660 mm
Height	2993 mm
Compact height	2063 mm
Safety valve	Pressure relief valve
Forklift support	Included

FILTRATION

Primary filter type	6x Cartridges
Filter surface	520000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Automatic SP

FEATURES



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



ELECTRICAL PANEL

Electrical panel, implementable with additional functions




POWER SUPPLY CABLE



PLUG

4-pole industrial plug




DEFLECTOR

Internal deflector to protect the filter



STEEL CONSTRUCTION

Rugged industrial coated steel construction



STR

Four legs to discharge in big bag



PRV

Pressure relief valve installed



GFR

Lifting eyebolts

OPTIONS

STRUCTURE AND OPTIONS

60[✓] HZ

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



ATEX CERTIFICATION



RC
Remote control 24V ON/OFF

ACCESSORIES



P12348
DRY KIT Ø 70MM
Large-diameter configuration for removing bulky debris and heavy dust in industrial settings. - 5-meter reinforced polyurethane hose - 2 ...