

SUMP VACUUM CLEANERS FOR OIL AND CHIPS

RAM OIL 250 TS

INDUSTRIAL VACUUM FOR LUBRICATING OILS AND CHIPS



POWER
5,5 kW - 7,5 HP



APPLICATION
Oils and lubricants mixed
shavings



CAPACITY
250 lt

FEATURES


- Filters and reuses lubricating and cutting oils
- Simplified liquid collection and swarf management
- Suction and discharge filtered liquid simultaneously
- Sturdy painted steel construction

HIGHLIGHTS




SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free work. A metal silencer is included as standard in the turbine to ensure a low noise level.

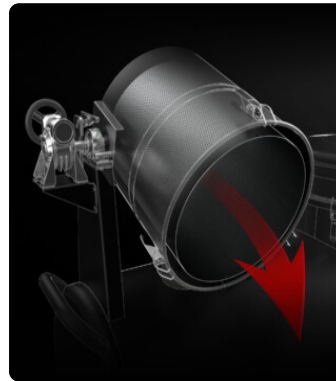


COMFORTABLE CHIP DISPOSAL

A tipping hopper is installed above the vacuum cleaner's large container. The collected liquid passes through a liquid filter with an efficiency of 150μ and a grid basket, which trap chips and simplify their disposal. In this way, even the smallest solid particles can be separated, making the filtered liquid suitable for reuse.

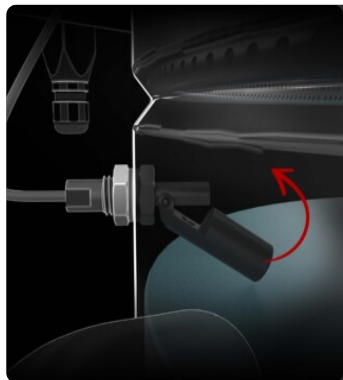

SAFETY FLOATING DEVICE

An electric level probe immediately stops suction when the liquid exceeds a certain container fill level, protecting the suction unit.

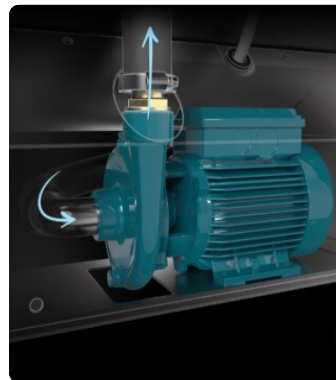

LIQUID DISCHARGE SYSTEM

An electric pump is installed inside the container and allows the extracted and filtered liquids to be discharged quickly. Thanks to the non-return valve, it is possible to suction and discharge at the same time, without stopping the machine.

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	5,5 kW - 7,5 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	440 mBar
Maximum air flow	330 m3/h
Insulation class	55 F IP
Noise level	72 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Solids capacity	70 lt
Liquids capacity	250 lt
Liquid discharge system	Discharge pump
Liquid discharge rate	80 Lt/min
Dimensions	850 X 1550 mm
Height	1780 mm
Weight	240 Kg
Accessory kit included	P12352
Solid separation	Tilting hopper

FILTRATION

Primary filter type	Bag
Media	Polypropylene 150μm

FEATURES



P12352 OIL & SWarf KIT

Basic kit containing specific accessories for 50 mm diameter oil and swarf vacuuming application



LIQUID DISCHARGE PUMP

Allows simultaneous suction and discharge of liquid



OIL-PROOF CARTRIDGE

Oil-proof cartridge for motor protection



HOSE WITH DISCHARGE VALVE



PLUG

4-pole industrial plug



HOSE HOOK



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



FILTER CLOGGING INDICATOR

Filter clogged or need to be replaced indicator light



POWER SUPPLY CABLE



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



PRV

Pressure relief valve installed



GB

Metal grid basket

OPTIONS

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



BX
Stainless steel bin AISI 304

ACCESSORIES



P12351
OIL & SWARF KIT Ø 40MM.
Quick solution for vacuuming up metal scraps and oily residues in machine shops. - 3 m of reinforced polyurethane hose - 2 anti-static r
...



P12352
OIL & SWARF KIT Ø 50MM.
Quick solution for vacuuming up metal scraps and oily residues in machine shops. - 3 m of reinforced polyurethane hose - 2 anti-static r
...



P12354
OIL & SWARF KIT PRO Ø 40MM
Complete system for collecting oil and metal shavings, with specific accessories for every part of the machine tool. - 3 m of reinforced ...



P12355
OIL & SWARF KIT PRO Ø 50MM
Complete system for collecting oil and metal shavings, with specific accessories for every part of the machine tool. - 3 m of reinforced ...