

SUMP VACUUM CLEANERS FOR OIL AND CHIPS

CLEAN AIR 2000

VACUUM CLEANER FOR OILY MISTS



POWER
0,75 kW




APPLICATION
Oil mist

FEATURES


- 4 stages of progressive efficiency filtration
- High air flow rate for outstanding performance
- Low environmental impact and high energy saving
- Compact and easy to install on any machine tool

HIGHLIGHTS

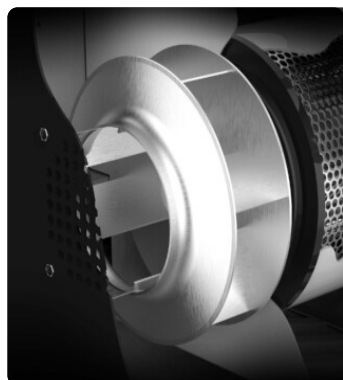

SUCTION UNIT

A backward-bladed impeller designed to generate a powerful coalescing effect is intended to quietly convey airflow into the vacuum cleaner.

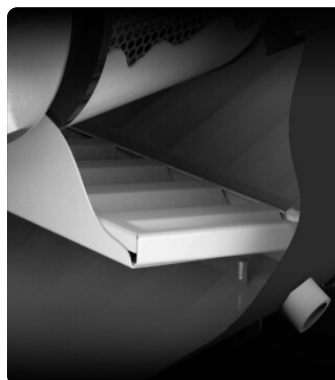


PRE-FILTERING UNIT

The fluid passes through an effective labyrinth prefilter for the removal of coarse mists.



FILTER UNIT

A special very high surface area M-class filter cartridge lined with a regenerable coalescing washing mat captures the remaining microneedles.

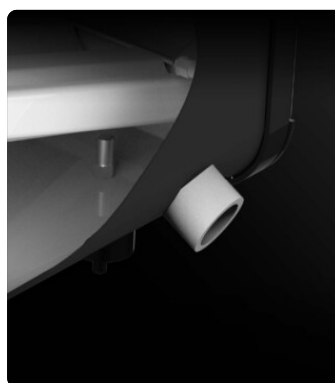

EXHAUST SYSTEM

The dual recondensed lubricant-coolant drainage system ensures perfect and effective drainage in any application.

TECHNICAL DATA

MOTOR

Typologies	Electric Fan
Power	0,75 kW
Frequency	50/60 Hz
Voltage	400 V
Maximum air flow	2000 m3/h
Noise level	68 dB(A)

MACHINE

Suction inlet	200 Ø mm
Dimensions	600 x 1510 mm
Height	451 mm
Weight	54 Kg

FILTRATION

Primary filter type	Cartridge
EN 60335-2-69 filtration class	M
Media	cellulose

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



POST H
Post-Cartridge



PRE H
Pre-Cartridge