

SUMP VACUUM CLEANERS FOR OIL AND CHIPS

# CLEAN AIR 800

## VACUUM CLEANER FOR OILY MISTS



POWER  
0,37 kW




APPLICATION  
Oil mist

## FEATURES


- 4 stages of progressive efficiency filtration
- Low environmental impact and high energy saving
- High air flow rate for outstanding performance
- Compact and easy to install on any machine tool

## HIGHLIGHTS

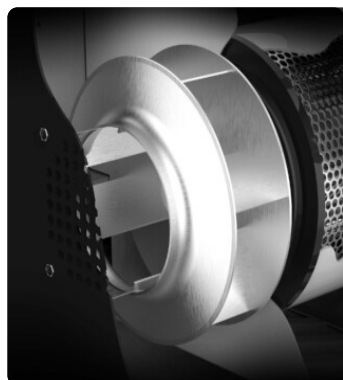

### SUCTION UNIT

A backward-bladed impeller designed to generate a powerful coalescing effect is intended to quietly convey airflow into the vacuum cleaner.

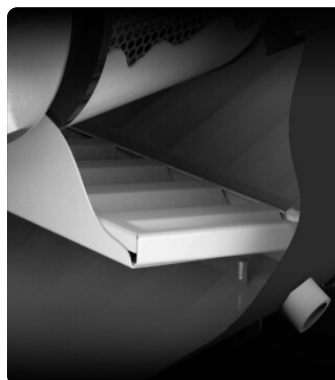


### PRE-FILTERING UNIT

The fluid passes through an effective labyrinth prefilter for the removal of coarse mists.



### FILTER UNIT

A special very high surface area M-class filter cartridge lined with a regenerable coalescing washing mat captures the remaining microneedles.

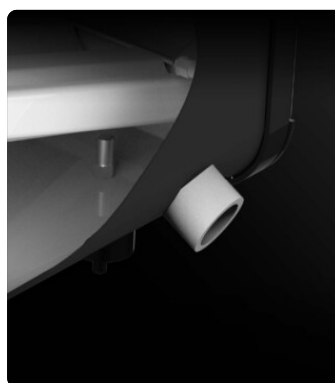

### EXHAUST SYSTEM

The dual recondensed lubricant-coolant drainage system ensures perfect and effective drainage in any application.

## TECHNICAL DATA

### MOTOR

Typologies	Electric Fan
Power	0,37 kW
Frequency	50/60 Hz
Voltage	400 V
Maximum air flow	800 m3/h
Noise level	66 dB(A)

### MACHINE

Suction inlet	150 Ø mm
Dimensions	467 x 467 mm
Height	451 mm
Weight	40 Kg

### FILTRATION

Primary filter type	Cartridge
EN 60335-2-69 filtration class	M
Media	cellulose

## OPTIONS

### AVAILABLE FILTER CLEANING SYSTEMS



**POST H**  
Post-Cartridge



**PRE H**  
Pre-Cartridge