

WELDING FUME EXTRACTORS

# XM TOOLS

## INDUSTRIAL VACUUM FOR MECHANICAL PROCESSING



**POWER**  
1,3 kW - 1,8 HP



**APPLICATION**  
Powders, solids and shavings




**CAPACITY**  
20Lt

## FEATURES

- Compact and easy to handle
- Multi-stage filtration for maximum operator safety
- Sturdy painted steel construction
- Possibility of direct remote control from power tool

## HIGHLIGHTS

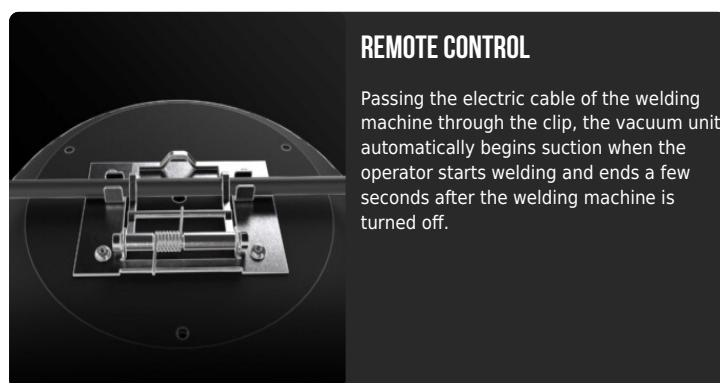

## TECHNICAL DATA

### MOTOR

Typologies	By-pass
Power	1,3 kW - 1,8 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	190 m3/h
Noise level	72 dB(A)
Remote control	Power tool socket

### MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	20 Lt
Dimensions	534 x 471 mm
Height	983 mm
Weight	36 Kg

### FILTRATION

Primary filter type	Cartridge
Filter surface	35000 cm2
EN 60335-2-69 filtration class	M
Media	PTFE coated polyester
Filter Cleaning System	Jet Clean
JetClean Guillotine	Included

## FEATURES



**SHUKO TYPE PLUG**



**FILTER CLOGGING INDICATOR**  
Filter clogged or need to be replaced  
indicator light



**POWER SUPPLY CABLE**



**WHEEL WITH BRAKE**  
Non-marking wheel with integrated brake



**WHEELS**  
Non-marking pivoting wheels



**STEEL CONSTRUCTION**  
Rugged industrial coated steel construction



**JC**  
Jet Clean

## OPTIONS

### AVAILABLE FILTER MEDIA



**HEPA 13**  
Absolute filter (EN 1822)  
35.000 cm<sup>2</sup> filter surface  
H13 Class Filter (EN 1822)  
Glass fiber



**HEPA 14**  
Absolute filter (EN 1822)  
22.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber

## STRUCTURE AND OPTIONS

**60<sup>Hz</sup>**

**60HZ**  
Available in 60Hz version



**3 YEARS WARRANTY**  
Purchasing the replacement filter along with the vacuum



**BX**  
Stainless steel bin AISI 304




**GRD**  
Grounding

## ACCESSORIES



**P13638**  
**STARTER KIT Ø 40MM**  
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



**P12000**  
**SUCTION HOOD (400X50MM)**  
Galvanised steel suction hood for welding fumes or suspended dusts. Connection for 50mm diameter pipe with bracket and magnet for positionin ...