

WELDING FUME EXTRACTORS

XM TOOLS

INDUSTRIAL SHOP VACUUM FOR MECHANICAL PROCESSING



POWER
1,3 kW - 1,8 HP



APPLICATION
Powders, solids and
shavings




CAPACITY
20 Lt

FEATURES

- Compact and easy to handle
- Multi-stage filtration for maximum operator safety
- Sturdy painted steel construction
- Possibility of direct remote control from power tool

HIGHLIGHTS

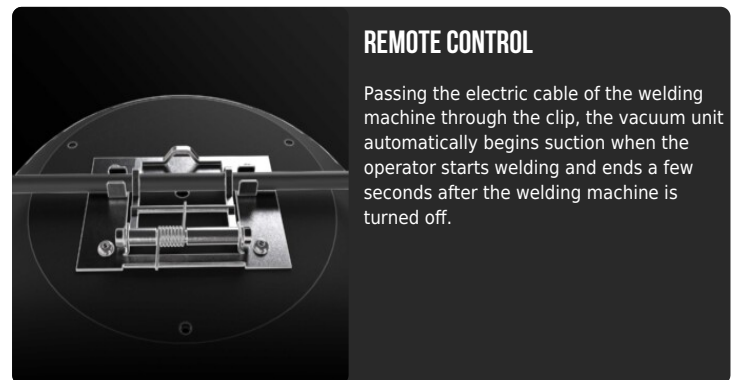

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	1,3 kW - 1,8 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	190 m3/h
Noise level	72 dB(A)
Remote control	Power tool socket

MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	20 Lt
Dimensions	534 x 471 mm
Height	983 mm
Weight	36 Kg

FILTRATION

Primary filter type	Cartridge
Filter surface	16000 cm2
EN 60335-2-69 filtration class	M
Media	PTFE coated polyester
Filter Cleaning System	Jet Clean
JetClean Guillotine	Included

FEATURES



SHUKO TYPE PLUG



FILTER CLOGGING INDICATOR

Filter clogged or need to be replaced
indicator light



POWER SUPPLY CABLE



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



JC

Jet Clean

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 13

Absolute filter (EN 1822)
35.000 cm² filter surface
H13 Class Filter (EN 1822)
Glass fiber



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



BX
Stainless steel bin AISI 304




GRD
Grounding

ACCESSORIES



P13638
STARTER KIT Ø 40MM
Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P12000
SUCTION HOOD (400X50MM)
Galvanised steel suction hood for welding fumes or suspended dusts. Connection for 50mm diameter pipe with bracket and magnet for positionin ...