

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

# AS 085

## INDUSTRIAL VACUUM FOR TRIMS, PRODUCTION CUTTINGS AND WASTE



**POWER**  
0,85 kW - 1,2 HP



**APPLICATION**  
Bulky scraps and cuttings




**CAPACITY**  
120 Lt

## FEATURES

- Suction of trims and bulky cuttings
- Large collection capacity
- Can be installed directly on production lines
- Window to check fill level

## HIGHLIGHTS

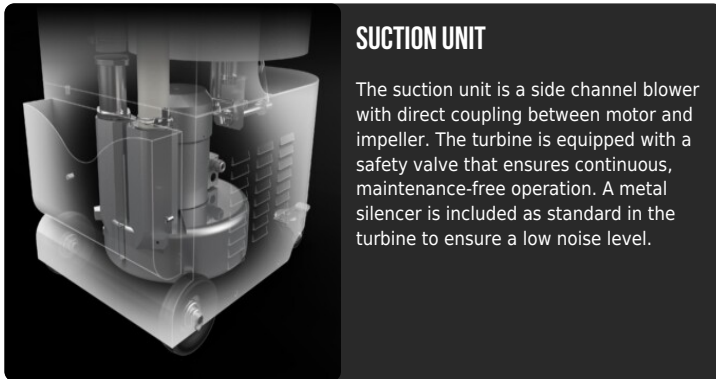


### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve that ensures continuous, maintenance-free operation. A metal silencer is included as standard in the turbine to ensure a low noise level.



### FILTERING COLLECTION BAG

Polyester bag filter for material collection that compacts material to the bottom, thus enabling the suction of large amounts of material

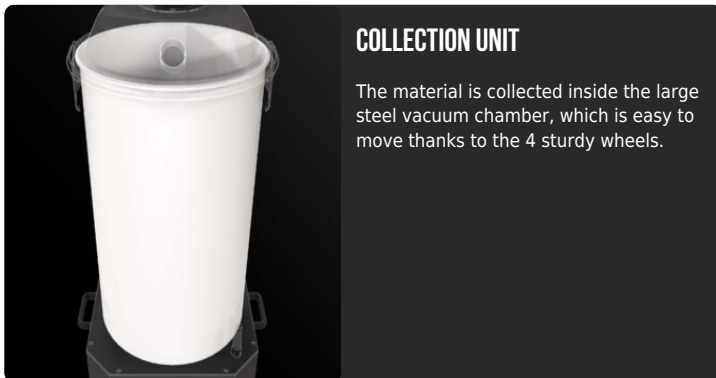

### COLLECTION UNIT

The material is collected inside the large steel vacuum chamber, which is easy to move thanks to the 4 sturdy wheels.



### LEVEL INSPECTION DOOR

An inspection window allows inspection of the amount of material inside the container without having to open the top cover

## TECHNICAL DATA

### MOTOR

Typologies	Side channel blower
Power	0,85 kW - 1,2 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	160 mBar
Maximum air flow	150 m3/h
Insulation class	55   F IP
Noise level	64 dB(A)

### MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	120 Lt
Dimensions	510 x 590 mm
Height	1440 mm
Weight	58 Kg
Safety valve	Pressure relief valve

### FILTRATION

Primary filter type	Bag
Media	Polyester

OPTIONS

STRUCTURE AND OPTIONS

**60**  **HZ**


**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum



**GRD**

Grounding



**TX**

Stainless steel bin, chamber and frame AISI 304