

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

# BF 150

## ON-BOARD MACHINERY FINE DUST EXTRACTOR



**POWER**  
1,5 kW - 2,2 HP



**APPLICATION**  
Powders, solids and shavings






**CAPACITY**  
30 Lt

## FEATURES

- Constant recovery of scraps or fine dust, production residues
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

## HIGHLIGHTS

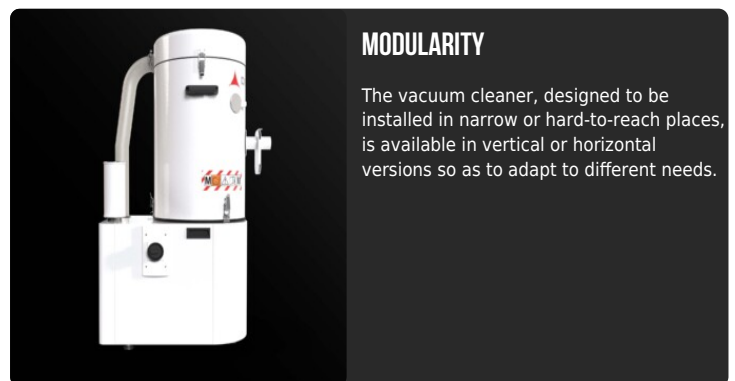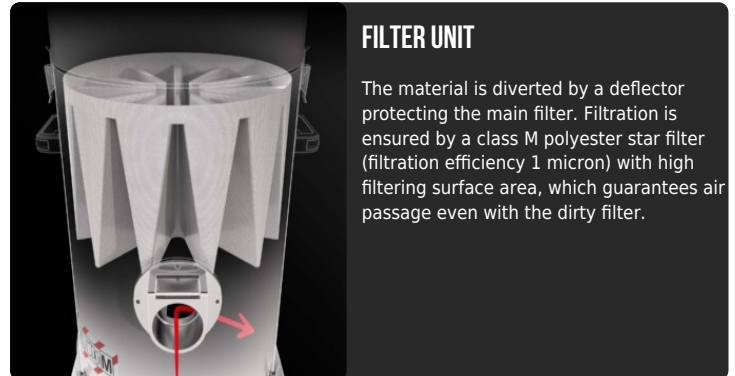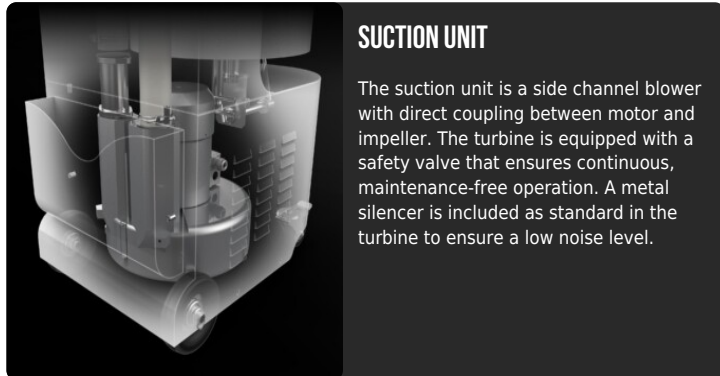

## TECHNICAL DATA

### MOTOR

Typologies	Side channel blower
Power	1,5 kW - 2,2 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	190 mBar
Maximum air flow	280 m3/h
Insulation class	55   F IP
Noise level	69 dB(A)

### MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	30 Lt
Dimensions	600 X 440 mm
Height	1130 mm
Weight	50 Kg
Safety valve	Pressure relief valve

### FILTRATION

Primary filter type	Star
Filter surface	15000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Manual

**OPTIONS**

**AVAILABLE FILTER MEDIA**



**HEPA 14**  
Absolute filter (EN 1822)  
22.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber



**PTFE ANT**  
Antistatic PTFE filter (M class EN 60335-2-69)



**PTFE**  
PTFE Filter (M class EN 60335-2-69)



**ANT M**  
Antistatic filter (M class EN 60335-2-69)

**STRUCTURE AND OPTIONS**



**60HZ**  
Available in 60Hz version



**3 YEARS WARRANTY**  
Purchasing the replacement filter along with the vacuum



**TX**  
Stainless steel bin, chamber and frame AISI 304