

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

BF 085

ON-BOARD MACHINERY FINE DUST EXTRACTOR



POWER
0,85 kW - 1,2 HP



APPLICATION
Powders, solids and shavings




CAPACITY
30Lt

FEATURES


- Constant recovery of scraps or fine dust, production residues
- Compact, for installation in narrow places
- Available in horizontal and vertical construction
- Easy to maintain

HIGHLIGHTS

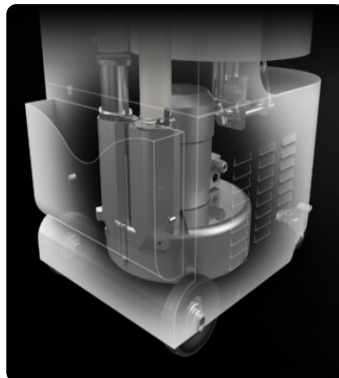

SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve that ensures continuous, maintenance-free operation. A metal silencer is included as standard in the turbine to ensure a low noise level.

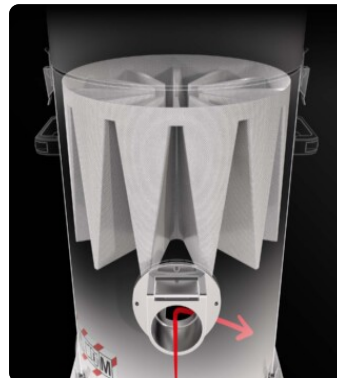

FILTER UNIT

The material is diverted by a deflector protecting the main filter. Filtration is ensured by a class M polyester star filter (filtration efficiency 1 micron) with high filtering surface area, which guarantees air passage even with the dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the filter surface.



MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	0,85 kW - 1,2 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	160 mBar
Maximum air flow	150 m3/h
Insulation class	55 F IP
Noise level	69 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	30 Lt
Dimensions	600 X 440 mm
Height	1130 mm
Weight	46 Kg
Safety valve	Pressure relief valve

FILTRATION


Primary filter type	Star
Filter surface	15000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Manual

FEATURES



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



DEFLECTOR

Internal deflector to protect the filter



POWER SUPPLY CABLE



PLUG

4-pole industrial plug



STEEL CONSTRUCTION

Rugged industrial coated steel construction



PRV

Pressure relief valve installed

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT

Antistatic PTFE filter (M class EN 60335-2-69)



PTFE

PTFE Filter (M class EN 60335-2-69)



ANT M

Antistatic filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



TX

Stainless steel bin, chamber and frame AISI 304