

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

UPF 150

INDUSTRIAL VACUUM FOR INTEGRATION INTO THE PRODUCTION LINE



POWER
1,5 kW - 2,2 HP



APPLICATION
Powders, solids and
shavings




CAPACITY
10Lt

FEATURES

- Constant recovery of production waste or residual dust
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

HIGHLIGHTS

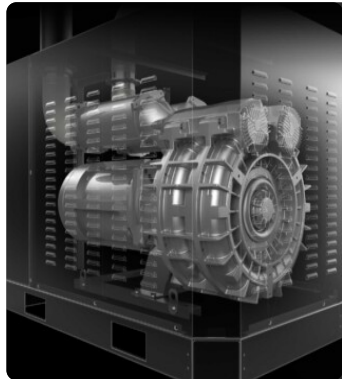


SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve to ensure continuous, maintenance-free operation.



FILTER UNIT

Filtration is provided by a Class M polyester bag filter (filtration efficiency 1 micron) with a high filtering surface area, which ensures air passage even with a dirty filter.

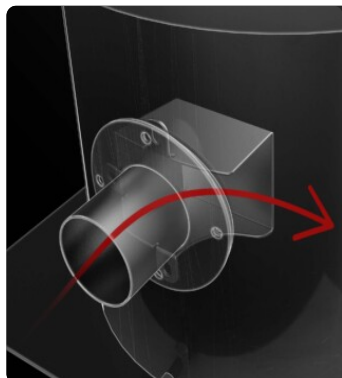

INTERNAL DEFLECTOR

Sucked-in material is diverted by a deflector protecting the main filter.



MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	1,5 kW - 2,2 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	190 mBar
Maximum air flow	280 m3/h
Insulation class	55 F IP
Noise level	64 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	AISI304 stainless steel container
Capacity	10 Lt
Dimensions	410 x 730 mm
Height	550 mm
Weight	42 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Bag
Filter surface	8000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester

OPTIONS

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum