

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

UPF 150 C

INDUSTRIAL VACUUM FOR MACHINERY INSTALLATION



POWER
1,5 kW - 2,2 HP



APPLICATION
Fine, dry and clogging
powders





CAPACITY
10 Lt

FEATURES

- Constant recovery of scraps or fine dust, production residues
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

HIGHLIGHTS

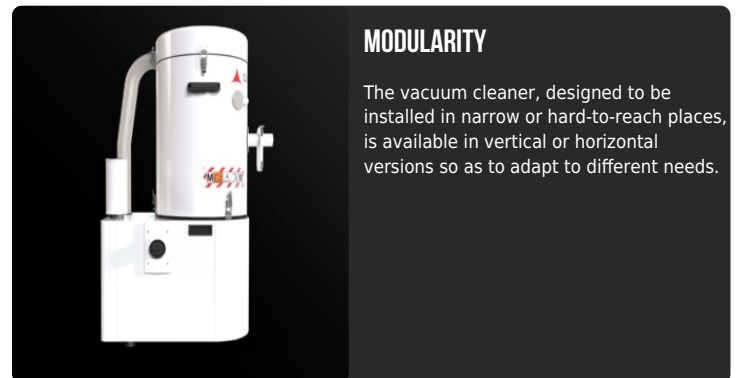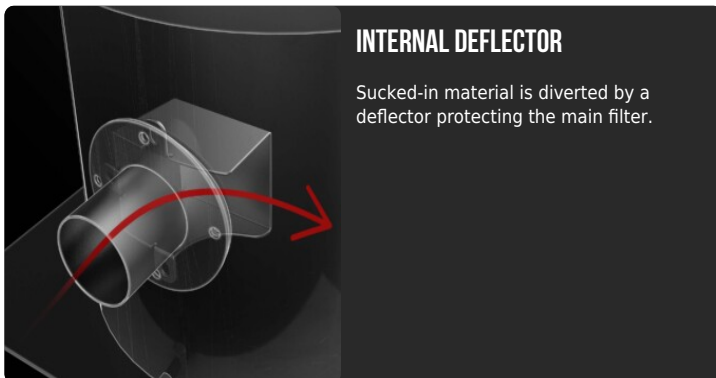

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	1,5 kW - 2,2 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	190 mBar
Maximum air flow	280 m3/h
Insulation class	55 F IP
Noise level	64 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	AISI304 stainless steel container
Capacity	10 Lt
Dimensions	410 x 730 mm
Height	550 mm
Weight	42 Kg

FILTRATION

Primary filter type	Cartridge
Filter surface	10000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester

OPTIONS

STRUCTURE AND OPTIONS

60  **HZ**

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum