

ATEX AND ACD VACUUM CLEANERS

PUMA 15 DEX 1/3D

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POWER
11 kW - 15 HP



APPLICATION
Combustible dusts






CAPACITY
175 Lt

FEATURES

- Suitable and safe for intensive work in Atex 22 zones
- Maximum safety thanks to antistatic filtration and complete earthing
- Maximum power thanks to the Atex certified turbine
- Ideal for large centralized suction systems

HIGHLIGHTS

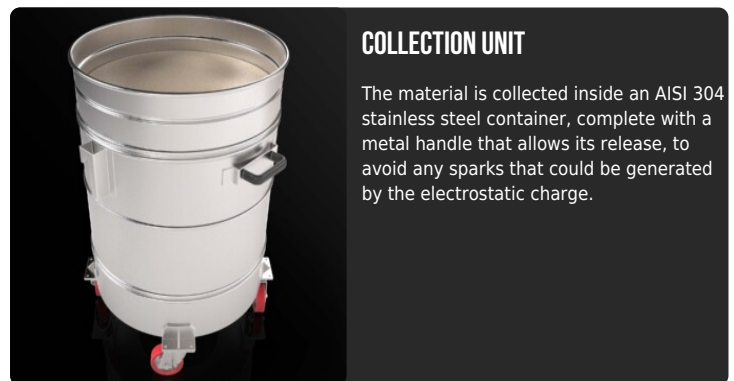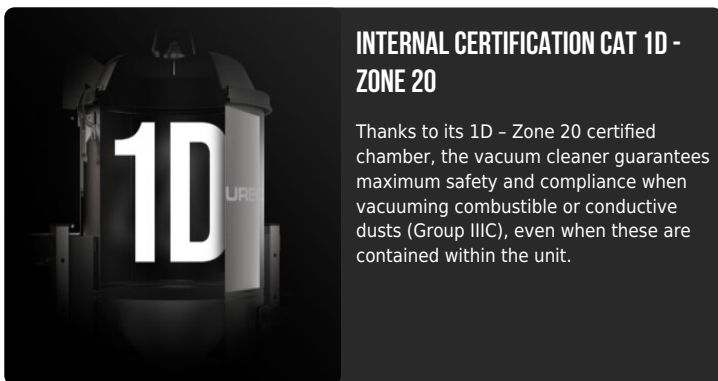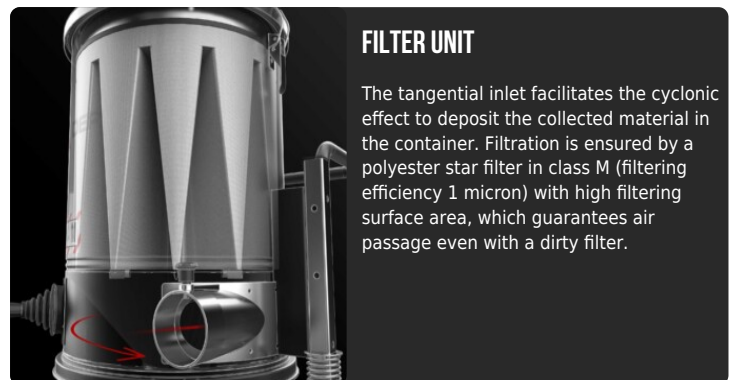

TECHNICAL DATA

MOTOR

Typologies	Atex 3D side channel blower
Power	11 kW - 15 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	300 mBar
Maximum air flow	920 m3/h
Insulation class	65 F IP
Noise level	74 dB(A)

MACHINE

Atex marking	II 1/3D Ex htc IIIC T140°C Da/Dc
EX category	1/3D
Operating temperature	-10/+40 C°
Suction inlet	100 Ø mm
Collection system	AISI304 stainless steel container
Capacity	175 Lt
Dimensions	850 x 1550 mm
Height	1980 mm
Weight	270 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Star
Filter surface	45000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP

Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 4
Polyester filter cartridges, 12 m² filter surface

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
110.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT

Antistatic PTFE filter (M class EN
60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



CONTAINER TILTABLE KIT
System for easy container emptying using forklift lifting.



FLAMELESS VENT
A valve that contains the flame and the overpressure generated by a possible explosion.



PANEL VENT FOR DIRECTIONAL EXPLOSION
An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.
Panel vent for explosion



FKL
Forklift bracket



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P14899
ANTISTATIC KIT Ø 70MM
Maximum efficiency and antistatic safety for removing large volumes of conductive material. - 5-meter antistatic PUR hose - 2x antistati ...