

CENTRAL VACUUM SYSTEMS

PUMA FIX 18 S

STATIONARY INDUSTRIAL VACUUM CLEANER FOR CENTRALIZED VACUUM SYSTEMS



Watch the video!



POWER
15 kW - 20 HP



APPLICATION
Powders, solids and
shavings





CAPACITY
175 Lt

FEATURES

- Powerful side-channel blowers suitable for continuous operation
- Easy to move with a forklift truck
- Ideal for installation in centralized systems
- Integrated cyclonic system to extend the useful life of the vacuum

HIGHLIGHTS

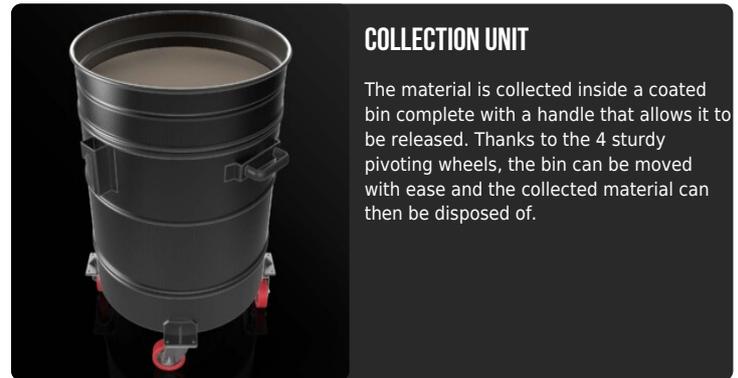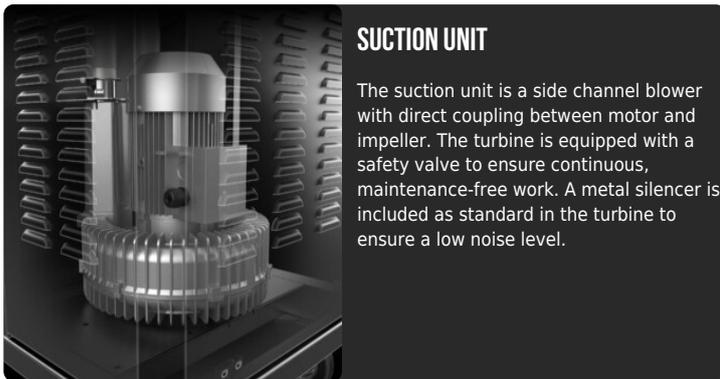

TECHNICAL DATA

MOTOR

| | |
|--------------------------|--------------------------|
| Typologies | Side channel blower |
| Power | 15 kW - 20 HP |
| Frequency | 50/60 Hz |
| Voltage | 400 V |
| Vacuum in continuous run | 530 mBar |
| Maximum air flow | 720 m3/h |
| Insulation class | 55 F IP |
| Noise level | 74 dB(A) |
| Remote control | Free connector available |
| Electrical panel | Included |

MACHINE

| | |
|-------------------|-----------------------|
| Suction inlet | 100 Ø mm |
| Collection system | Steel container |
| Capacity | 175 Lt |
| Dimensions | 840 x 1700 mm |
| Height | 1970 mm |
| Safety valve | Pressure relief valve |
| Forklift support | Included |

FILTRATION

| | |
|--------------------------------|----------------------|
| Primary filter type | 4x Cartridges |
| Filter surface | 120000 cm2 |
| EN 60335-2-69 filtration class | M |
| Media | Antistatic polyester |
| Filter Cleaning System | Automatic SP |

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
110.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS



60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with
the vacuum



BX
Stainless steel bin AISI 304



GX
Stainless steel bin and chamber AISI 304