

ATEX AND ACD VACUUM CLEANERS

# PUMA 15 SP DEX 1/3D

## ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



**POWER**  
11 kW - 15 HP



**APPLICATION**  
Combustible dusts



**CAPACITY**  
175 Lt

## FEATURES

- Suitable and safe for intensive work in Atex 22 zones
- High efficiency antistatic filtration with integrated automatic cleaning system and grounding
- Maximum power thanks to the Atex certified blower
- Ideal for large centralized suction systems

## HIGHLIGHTS




### SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.




### SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.

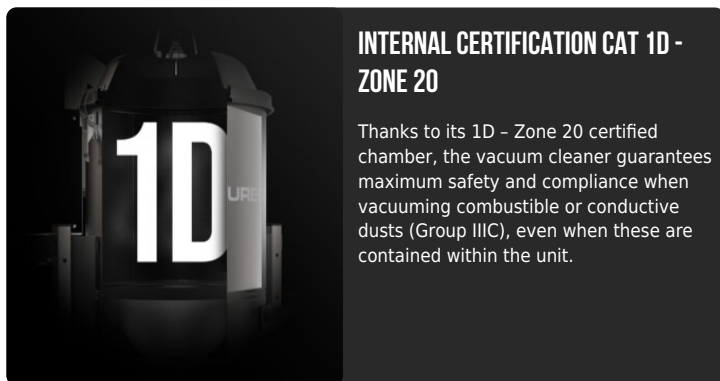

### INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.

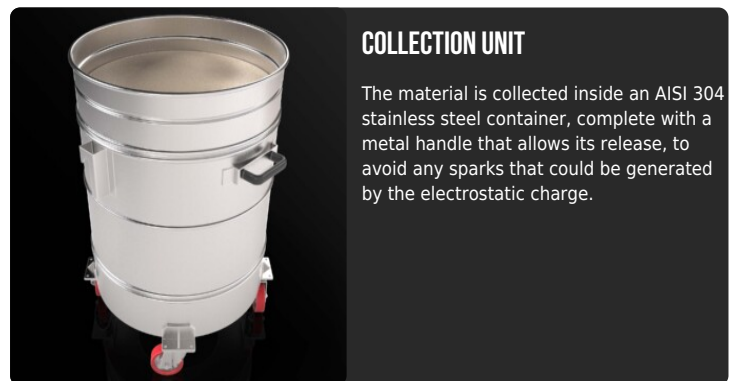

### COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

## TECHNICAL DATA

### MOTOR

Typologies	Atex 3D side channel blower
Power	11 kW - 15 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	300 mBar
Maximum air flow	920 m3/h
Insulation class	65   F IP
Noise level	74 dB(A)

### MACHINE

Atex marking	II 1/3D Ex htc IIIC T140°C Da/Dc
EX category	1/3D
Operating temperature	-10/+40 C°
Suction inlet	100 Ø mm
Collection system	AISI304 stainless steel container
Capacity	175 Lt
Dimensions	850 x 1550 mm
Height	1980 mm
Weight	270 Kg
Safety valve	Pressure relief valve

### FILTRATION

Primary filter type	4x Cartridges
Filter surface	120000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Automatic SP

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



**SP**

Automatic reverse jet cleaning system  
Antistatic M class filter (EN 60335-2-69), 4  
Polyester filter cartridges, 12 m<sup>2</sup> filter surface

AVAILABLE FILTER MEDIA



**HEPA 14**

Absolute filter (EN 1822)  
110.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber



**PTFE ANT**

Antistatic PTFE filter (M class EN  
60335-2-69)

**STRUCTURE AND OPTIONS**

**60<sup>Hz</sup>**

**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum



**CONTAINER EMPTYING KIT**

System for easy container emptying using forklift lifting.



**FLAMELESS VENT**

A valve that contains the flame and the overpressure generated by a possible explosion.



**PANEL VENT FOR DIRECTIONAL EXPLOSION**

An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.  
Panel vent for explosion



**FKL**

Forklift bracket



**GX**

Stainless steel bin and chamber AISI 304