

ACCESSORIES

SFC 800

FILTER SEPARATOR WITH CONTAINER



APPLICATION
Fine, dry and clogging
powders




CAPACITY
175 Lt

FEATURES

- Very high filtration efficiency
- Convenient detachable container for managing the vacuumed material

- Simple maintenance

HIGHLIGHTS

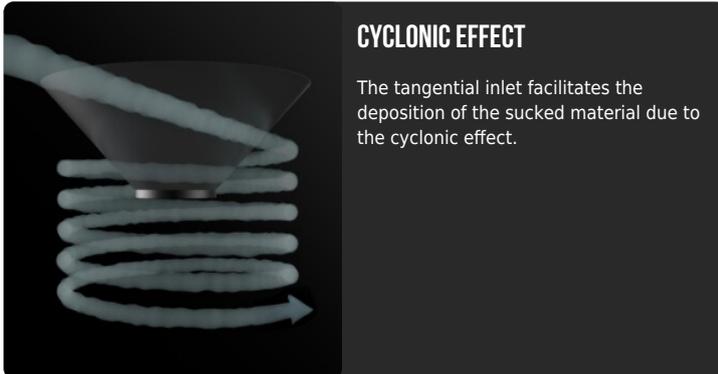

CYCLONIC EFFECT

The tangential inlet facilitates the deposition of the sucked material due to the cyclonic effect.




FILTER UNIT

Filtration is ensured by polyester cartridge filters in class M (filtration efficiency 1 micron) with high filtering surface area, which guarantees the passage of air even with dirty filter.



SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.

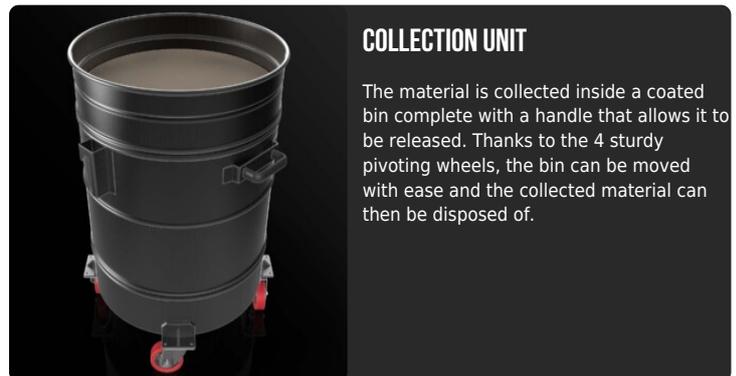

COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows it to be released. Thanks to the 4 sturdy pivoting wheels, the bin can be moved with ease and the collected material can then be disposed of.

TECHNICAL DATA

MACHINE

Intake suction inlet	100
Outlet suction inlet	130 Ø mm
Collection system	Steel container
Capacity	175 Lt
Dimensions	800 x 800 mm
Height	2227 mm

FILTRATION

Primary filter type	4x Cartridges
Filter surface	110000 cm ²
EN 60335-2-69 filtration class	M
Media	Antistatic polyester