

HEAVY DUTY THREE-PHASE INDUSTRIAL VACUUM CLEANERS

# PUMA 15 P ACD

## HIGH-POWER INDUSTRIAL VACUUM FOR COMBUSTIBLE DUST



**POWER**  
11 kW - 15 HP



**APPLICATION**  
Combustible dusts



**CAPACITY**  
175 Lt

## FEATURES

- ACD classified for combustible dust extraction in non-Atex classified areas
- Multiple construction options available
- Can also be used in heavy-duty and continuous applications
- Can be integrated into centralized vacuum systems

## HIGHLIGHTS




### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free work. A metal silencer is included as standard in the turbine to ensure a low noise level.




### FILTER UNIT

The tangential inlet facilitates the cyclonic effect to deposit the collected material in the container. Filtration is ensured by a polyester star filter in class M (filtering efficiency 1 micron) with high filtering surface area, which guarantees air passage even with a dirty filter.

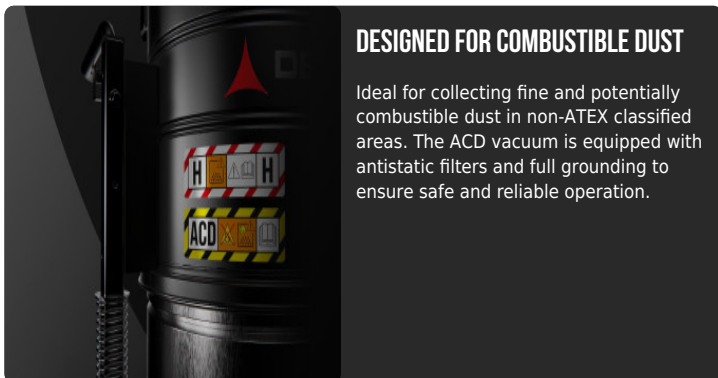

### DESIGNED FOR COMBUSTIBLE DUST

Ideal for collecting fine and potentially combustible dust in non-ATEX classified areas. The ACD vacuum is equipped with antistatic filters and full grounding to ensure safe and reliable operation.

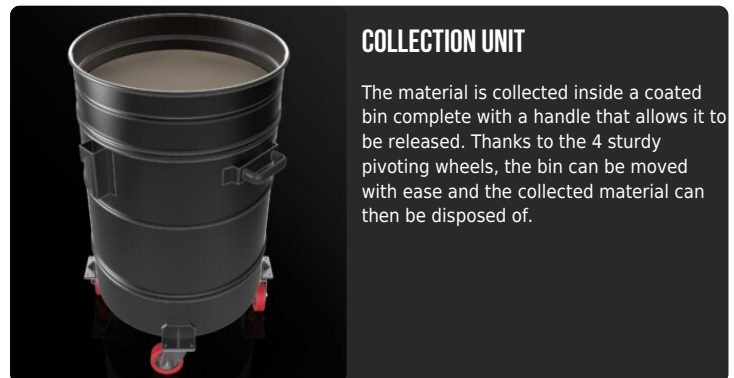

### COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows it to be released. Thanks to the 4 sturdy pivoting wheels, the bin can be moved with ease and the collected material can then be disposed of.

## TECHNICAL DATA

### MOTOR

Typologies	Side channel blower
Power	11 kW - 15 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	300 mBar
Maximum air flow	950 m3/h
Insulation class	55   F IP
Noise level	74 dB(A)
Remote control	Free connector available

### MACHINE

Suction inlet	100 Ø mm
Collection system	Steel container
Capacity	175 Lt
Dimensions	850 x 1550 mm
Height	1980 mm
Weight	330 Kg
Safety valve	Pressure relief valve
Forklift support	Included

### FILTRATION

Primary filter type	Star
Filter surface	45000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



**SP**  
Automatic reverse jet cleaning system  
Antistatic M class filter (EN 60335-2-69), 4  
Polyester filter cartridges, 12 m<sup>2</sup> filter surface



**SE**  
Semiautomatic electrical filter shaker



**PSC**  
Semiautomatic pneumatic filter shaker



**COM**  
Compressor on board  
Compressor fitted on the back cover

AVAILABLE FILTER MEDIA



**HEPA 14**  
Absolute filter (EN 1822)  
110.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber

## STRUCTURE AND OPTIONS

**60<sup>Hz</sup>**

**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum



**ATEX CERTIFICATION**



**CONTAINER TILTABLE KIT**

System for easy container emptying using forklift lifting.



**GFR**

Lifting eyebolts



**FKL**

Forklift bracket



**BX**

Stainless steel bin AISI 304



**GX**

Stainless steel bin and chamber AISI 304

## ACCESSORIES



**P14899**

**ANTISTATIC KIT Ø 70MM**

Maximum efficiency and antistatic safety for removing large volumes of conductive material. - 5-meter antistatic PUR hose - 2x antistati ...