

HEAVY DUTY THREE-PHASE INDUSTRIAL VACUUM CLEANERS

PUMA 18 P ACD

HIGH-POWER INDUSTRIAL VACUUM FOR COMBUSTIBLE DUST



POWER
12,5 kW - 18 HP



APPLICATION
Combustible dusts



CAPACITY
175 Lt

FEATURES

- ACD classified for combustible dust extraction in non-Atex classified areas
- Multiple construction options available
- Can also be used in heavy-duty and continuous applications
- Can be integrated into centralized vacuum systems

HIGHLIGHTS




SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free work. A metal silencer is included as standard in the turbine to ensure a low noise level.




FILTER UNIT

The tangential inlet facilitates the cyclonic effect to deposit the collected material in the container. Filtration is ensured by a polyester star filter in class M (filtering efficiency 1 micron) with high filtering surface area, which guarantees air passage even with a dirty filter.

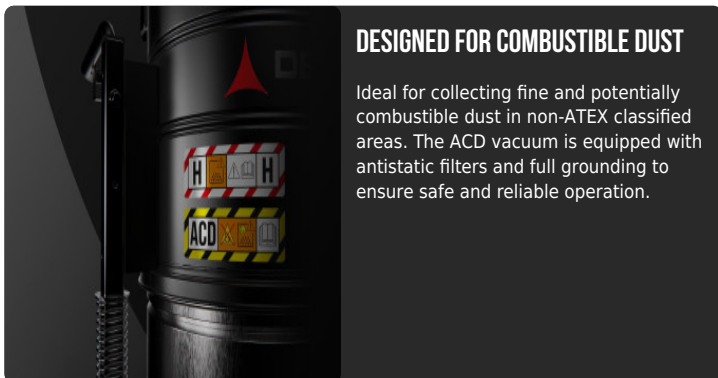

DESIGNED FOR COMBUSTIBLE DUST

Ideal for collecting fine and potentially combustible dust in non-ATEX classified areas. The ACD vacuum is equipped with antistatic filters and full grounding to ensure safe and reliable operation.

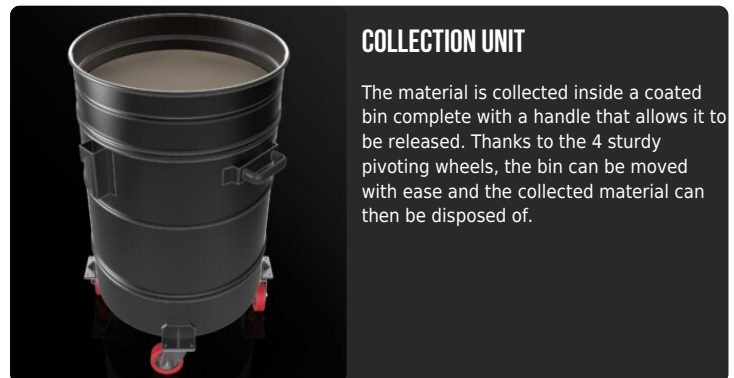

COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows it to be released. Thanks to the 4 sturdy pivoting wheels, the bin can be moved with ease and the collected material can then be disposed of.

TECHNICAL DATA

MOTOR

| | |
|--------------------------|--------------------------|
| Typologies | Side channel blower |
| Power | 12,5 kW - 18 HP |
| Frequency | 50/60 Hz |
| Voltage | 400 V |
| Vacuum in continuous run | 290 mBar |
| Maximum air flow | 1120 m3/h |
| Insulation class | 55 F IP |
| Noise level | 74 dB(A) |
| Remote control | Free connector available |

MACHINE

| | |
|-------------------|-----------------------|
| Suction inlet | 100 Ø mm |
| Collection system | Steel container |
| Capacity | 175 Lt |
| Dimensions | 850 x 1550 mm |
| Height | 1980 mm |
| Weight | 355 Kg |
| Safety valve | Pressure relief valve |
| Forklift support | Included |

FILTRATION

| | |
|--------------------------------|----------------------|
| Primary filter type | Star |
| Filter surface | 45000 cm2 |
| EN 60335-2-69 filtration class | M |
| Media | Antistatic polyester |
| Filter Cleaning System | Manual |

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP
Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 4
Polyester filter cartridges, 12 m² filter surface



SE
Semiautomatic electrical filter shaker



PSC
Semiautomatic pneumatic filter shaker



COM
Compressor on board
Compressor fitted on the back cover

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
110.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



ATEX CERTIFICATION



CONTAINER TILTABLE KIT
System for easy container emptying using forklift lifting.



GFR
Lifting eyebolts



FKL
Forklift bracket



BX
Stainless steel bin AISI 304



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P14899
ANTISTATIC KIT Ø 70MM
Maximum efficiency and antistatic safety for removing large volumes of conductive material. - 5-meter antistatic PUR hose - 2x antistati ...