

ATEX AND ACD VACUUM CLEANERS

ECOBULL T DEX 1/2D INERT

INDUSTRIAL VACUUM CLEANER FOR NEUTRALIZING CONDUCTIVE DUST IIIC



POWER
3 kW - 4 HP



APPLICATION
Combustible dusts





COLLECTION SYSTEM
Liquid bath inerting system

FEATURES

- Certified for intensive and continuous work in Atex 21 or 22 zones
- Category 1D certified internal protection for maximum safety
- Container with inerting liquid bath that prevents the formation of explosive atmospheres inside the extractor
- Ideal for safe extraction of Type IIIC conductive metal dusts

HIGHLIGHTS

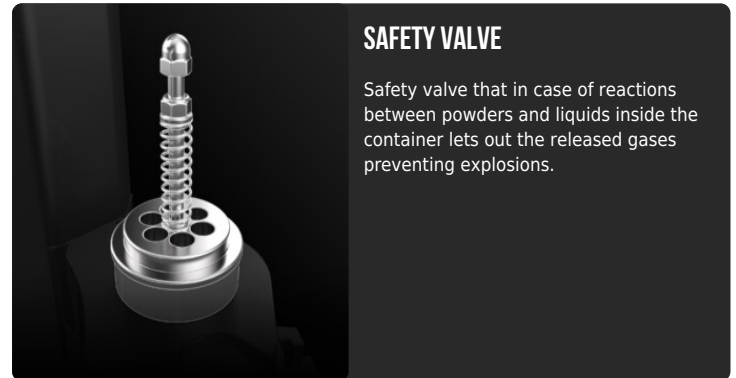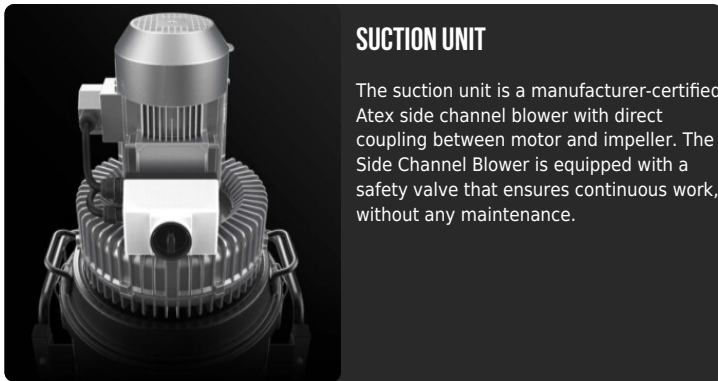

TECHNICAL DATA

MOTOR

Typologies	Atex 2D side channel blower
Power	3 kW - 4 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	230 mBar
Maximum air flow	340 m3/h
Insulation class	55 F IP
Noise level	72 dB(A)

MACHINE

Atex marking	II 1/2D Ex h IIIC T160 Da/Db
EX category	1/2D
Operating temperature	-20/+40 C°
Suction inlet	50 Ø mm
Collection system	Container with inerting liquid
Capacity	100 Lt
Liquid discharge system	Discharge valve
Dimensions	660 x 800 mm
Height	1630 mm
Weight	95 Kg
Solid separation	Basket grid
Liquid separation	150µm liquid filter
Safety valve	Hydrogen Vent

FILTRATION

Primary filter type	Cartridge
Filter surface	35000 cm2
EN 60335-2-69 filtration class	H13
Media	Antistatic polyester
Additional filter	Spark trap

ACCESSORIES



P13642
ANTISTATIC KIT PRO Ø 40MM

Kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P13641
ANTISTATIC STARTER KIT Ø 40MM

Basic kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P12378
ANTISTATIC STARTER KIT Ø 50MM

Basic kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner



P12377
ANTISTATIC KIT PRO Ø 50MM

Kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner