

ATEX AND ACD VACUUM CLEANERS

ECOBULL T DEX 3/3G

ATEX-CERTIFIED INDUSTRIAL VACUUM FOR USE IN ZONE 2



POWER
3 kW - 4 HP



APPLICATION
Powders, solids and
shavings




CAPACITY
65 Lt

FEATURES

- Certified for intensive work in Atex 2 zone
- Compact, sturdy, and easy to handle
- High filtration efficiency with the option of installing an additional absolute filter
- Maximum safety of use even in areas where gas is present

HIGHLIGHTS

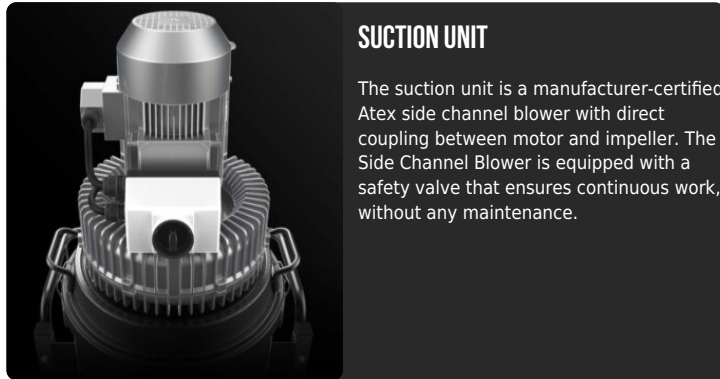

SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.



FILTER UNIT

The material is diverted by a deflector protecting the main filter. Filtration is ensured by a class M polyester star filter (filtration efficiency 1 micron) with high filtering surface area, which guarantees air passage even with the dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex 3G side channel blower
Power	3 kW - 4 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	230 mBar
Maximum air flow	340 m ³ /h
Insulation class	55 F IP
Noise level	74 dB(A)

MACHINE

Atex marking	II 3/3G Ex hIIB+H2T4 Gc/Gc
EX category	3/3G
Operating temperature	-20/+40 C°
Suction inlet	70 Ø mm
Collection system	AISI304 stainless steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1630 mm
Weight	95 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Star
Filter surface	24000 cm ²
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

OPTIONS

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version




3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



AB
Accessories basket



GX
Stainless steel bin and chamber AISI 304



CYCLONIC EFFECT
Tangential inlet and cyclone installed
Tangential inlet + cyclone

ACCESSORIES



P13642
ANTISTATIC KIT PRO Ø 40MM
Complete antistatic system for thorough cleaning of sensitive production environments. - 3 m of electrically conductive EVA tubing - 1x ...



P13641
ANTISTATIC STARTER KIT Ø 40MM
Safety kit for areas with electrostatic hazards, ideal for fine and conductive dust. - 3 m of electrically conductive EVA tubing - 1x 50 ...



P14901/EX
VERTIDEX – ATEX-CERTIFIED ACCESSORY KIT FOR CLEANING AT HEIGHT Ø 40MM
An ultra-lightweight carbon fiber extension system, conductive and ATEX Category 2D certified, designed to reach hard-to-reach areas and ele ...