

ATEX AND ACD VACUUM CLEANERS

ECOBULL M DEX 3/3G

ATEX-CERTIFIED INDUSTRIAL VACUUM FOR USE IN ZONE 2



POWER
1,8 kW - 2,4 HP



APPLICATION
Powders, solids and
shavings



CAPACITY
65 Lt

FEATURES


- Certified for intensive work in Atex 2 zone
- High filtration efficiency with the option of installing an additional absolute filter
- Compact, sturdy, and easy to handle
- Maximum safety of use even in areas where gas is present

HIGHLIGHTS



SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.

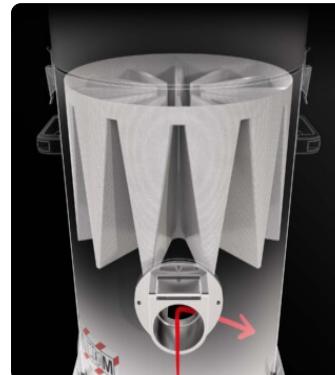

FILTER UNIT

The material is diverted by a deflector protecting the main filter. Filtration is ensured by a class M polyester star filter (filtration efficiency 1 micron) with high filtering surface area, which guarantees air passage even with the dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex 3G side channel blower
Power	1,8 kW - 2,4 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	180 mBar
Maximum air flow	240 m3/h
Insulation class	55 F IP
Noise level	72 dB(A)

MACHINE

Atex marking	II 3/3G Ex hIIIB+H2T4 Gc/Gc
EX category	3/3G
Operating temperature	-20/+40 C°
Suction inlet	70 Ø mm
Collection system	AISI304 stainless steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1630 mm
Weight	95 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER

Atex-certified vacuum cleaner with dry dust filtration, as per EN17348



DEFLECTOR

Internal deflector to protect the filter



4-PIN ATEX INDUSTRIAL PLUG



PRV

Pressure relief valve installed



GRD

Grounding



BX

Stainless steel bin AISI 304



ANT M

Antistatic filter (M class EN 60335-2-69)



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



POWER SUPPLY CABLE



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



HEPA 14

Absolute filter (EN 1822)

OPTIONS

STRUCTURE AND OPTIONS

60 Hz

60Hz

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



AB

Accessories basket



GX

Stainless steel bin and chamber AISI 304



CYCLONIC EFFECT

Tangential inlet and cyclone installed
Tangential inlet + cyclone

ACCESSORIES



P13642

ANTISTATIC KIT PRO Ø 40MM

Kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P13641

ANTISTATIC STARTER KIT Ø 40MM

Basic kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P14901/EX

VERTIDEX – ATEX-CERTIFIED ACCESSORY KIT FOR CLEANING AT HEIGHT Ø 40MM