

ATEX AND ACD VACUUM CLEANERS

# BL 45 DEX 1/3D – 1/2D

## ATEX-CERTIFIED INDUSTRIAL VACUUM FOR USE IN ZONE 21 OR 22



**POWER**  
1,1 kW - 1,5 HP



**APPLICATION**  
Combustible dusts



**CAPACITY**  
45 Lt

## FEATURES


- Certified for intensive and continuous work in Atex 21 or 22 zones
- Category 1D certified internal protection for maximum safety
- Compact, sturdy, and easy to handle
- Double level of progressive filtration in class M and H14, with complete grounding

## HIGHLIGHTS



### SUCTION UNIT

The vacuum unit is a powerful Brushless motor, suitable for continuous work. Two filters are installed on the vacuum cleaner head: one to protect the motor and the other placed on the air outlet. The air that comes out is totally filtered

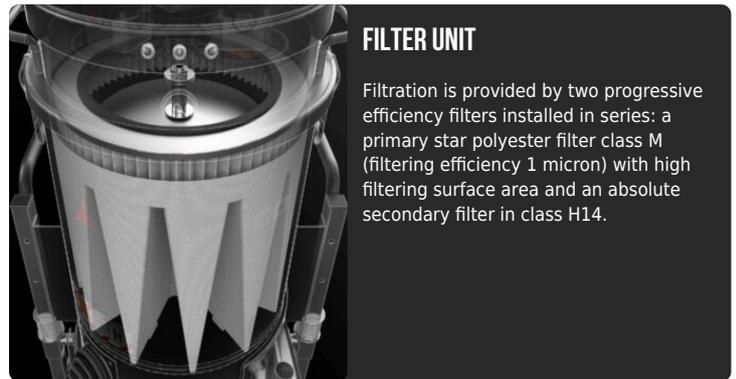

### FILTER UNIT

Filtration is provided by two progressive efficiency filters installed in series: a primary star polyester filter class M (filtering efficiency 1 micron) with high filtering surface area and an absolute secondary filter in class H14.



### INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.



### COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

## TECHNICAL DATA

### MOTOR

Typologies	Brushless
Power	1,1 kW - 1,5 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	230 mBar
Maximum air flow	220 m3/h
Noise level	72 dB(A)

### MACHINE

Atex marking	II 1/2D Ex h IIIC T140 Da/Db   II 1/3D Ex h IIIC T140 Da/Dc
EX category	1/3D - 1/2D
Operating temperature	-20/+40 C°
Suction inlet	70 Ø mm
Collection system	AISI304 stainless steel container
Capacity	45 Lt
Dimensions	540 x 620 mm
Height	1303 mm
Weight	45 Kg

### FILTRATION

Primary filter type	Star
Filter surface	15000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual
Secondary Absolute Filter	H14 - Included
Outlet air filter	Included
Inlet air filter	Included
Outlet Absolute filter	Included

OPTIONS

STRUCTURE AND OPTIONS

**60**  **HZ**

**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum



**AB**

Accessories basket



**GX**

Stainless steel bin and chamber AISI 304



**ACCESSORY HOLDER**

ACCESSORIES



**P13642**  
**ANTISTATIC KIT PRO Ø 40MM**  
Complete antistatic system for thorough cleaning of sensitive production environments. - 3 m of electrically conductive EVA tubing - 1x ...



**P13641**  
**ANTISTATIC STARTER KIT Ø 40MM**  
Safety kit for areas with electrostatic hazards, ideal for fine and conductive dust. - 3 m of electrically conductive EVA tubing - 1x 50 ...



**P14901/EX**  
**VERTIDEX – ATEX-CERTIFIED ACCESSORY KIT FOR CLEANING AT HEIGHT Ø 40MM**  
An ultra-lightweight carbon fiber extension system, conductive and ATEX Category 2D certified, designed to reach hard-to-reach areas and ele ...



**P12378**  
**ANTISTATIC STARTER KIT Ø 50MM**  
Certified basic configuration for charge dissipation on medium-diameter cables. - 3 m of electrically conductive EVA - 2 anti-static rub ...



**P12377**  
**ANTISTATIC KIT PRO Ø 50MM**  
Electrically conductive solution for maximum protection against static discharge. - 3 m of electrically conductive EVA - 2 anti-static r ...