

PNEUMATIC INDUSTRIAL VACUUM CLEANERS

XM 20 AIR JC

COMPACT PNEUMATIC INDUSTRIAL VACUUM



APPLICATION

Fine, dry and clogging
powders




CAPACITY

20 Lt

FEATURES

- No electrical power required
- No motor, no moving mechanical parts
- Filter stays efficient without stopping suction
- Compact and easy to move, 20 L bin

HIGHLIGHTS

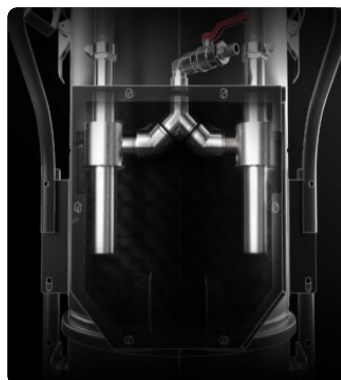


SUCTION UNIT

Suction is generated by two ejectors which generate, without the use of mechanical elements, a considerable vacuum inside the chamber, thus making suction possible.



FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

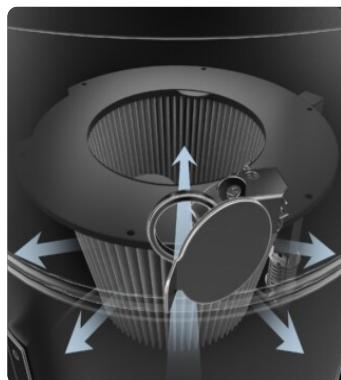

JET CLEAN FILTER CLEANING SYSTEM

Equipped with JetClean® filter cleaning system. Due to the different pressure between the outside and inside of the vacuum cleaner, the system generates a flow of air through the cartridge that detaches dust from the surface of the filter, keeping the filter efficient while working and without stopping suction.



COLLECTION UNIT

The material is collected inside a coated bin complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTOR

Typologies	Venturi ejector
Maximum vacuum	500 mBar
Maximum air flow	250 m3/h
Noise level	78 dB(A)
Air required	2500 lt/min
Pressure requirement	6 - 8 Bar

MACHINE

Suction inlet	50 Ø mm
Collection system	Steel container
Capacity	20 Lt
Dimensions	540 x 570 mm
Height	890 mm
Weight	30 Kg

FILTRATION

Primary filter type	Cartridge
Filter surface	16000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Jet Clean
JetClean Guillotine	Included

FEATURES



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



SD

Sliding damper



JC

Jet Clean



WHEELS

Non-marking pivoting wheels



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



STEEL CONSTRUCTION

Rugged industrial coated steel construction



COMPRESSED AIR SUPPLY VALVE

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



BX

Stainless steel bin AISI 304



GRD

Grounding

ACCESSORIES



P13638

STARTER KIT Ø 40MM

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming



P13640

DRY KIT Ø 40MM

Optimized configuration for thorough cleaning of floors and surfaces from dry dust.
- 3-meter Evaflex hose - 1x 50/40 antistatic rubber ...