

#JUSTOBEGLEAN



COMPACT EXTRACTOR



DEPURECO INDUSTRIAL VACUUMS SRL

CORSO EUROPA, 609 - 10088 VOLPIANO (TO) ITALIA
TEL. +39 011 98.59.117 FAX. +39 011 98.59.326
C.F. E P.I. 02258610357
DEPURECO@DEPURECO.COM WWW.DEPURECO.COM

- @DEPURECOINDUSTRIALVACUUMS
- @DEPURECO INDUSTRIAL VACUUMS
- @DEPURECO_INDUSTRIAL_VACUUMS
- @DVACUUMS



MANUAL SHAKER

STUDIED FOR SHAVINGS, GRANULES AND WET MATERIALS ·
HAND SHAKER SYSTEM FOR STAR FILTER CLEANING ·



SIMPLE AND EFFICIENT




PSC SYSTEM

STUDIED FOR SHAVINGS, GRANULES AND WET MATERIALS ·
SEMI - AUTOMATIC HAND SHAKER SYSTEM FOR STAR FILTER CLEANING ·



EFFICIENT AND RELIABLE

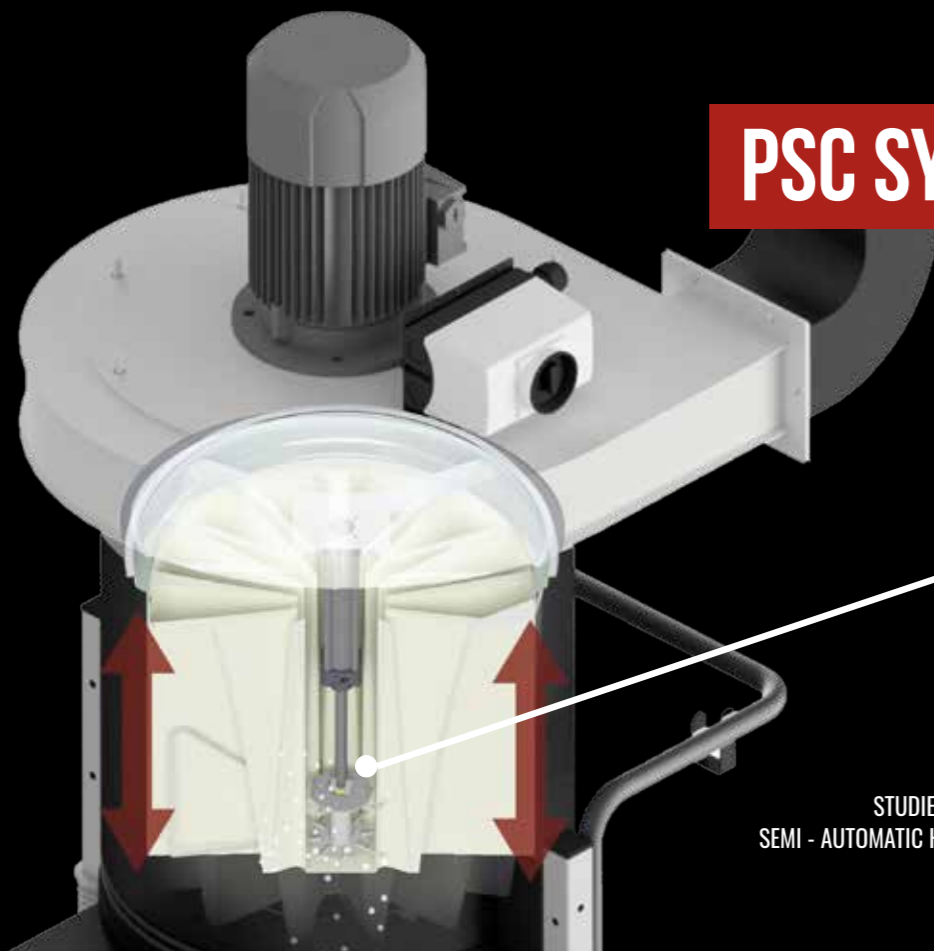

SP-SYSTEM


THE SP SYSTEM ALLOWS TO KEEP THE FILTER CLEAN
AUTOMATICALLY WITHOUT STOPPING THE VACUUM.
EACH FILTER IS CLEANED PERIODICALLY WITH A
COMPRESSED AIR JET.

THE SP SYSTEM IS PERFECT FOR BIG QUANTITIES OF
FINE AND DIFFICULT DUSTS.

CYCLICAL PROGRAMMER INSTALLED
ON THE VACUUM THANKS TO THE TOUCHSCREEN
IT IS POSSIBLE TO SET THE CLEANING CYCLE AND
ADJUST THE SYSTEM ACCORDING TO THE QUANTITY
AND THE KIND OF POWER.



CLEANING
THE FILTER
IS IMPORTANT

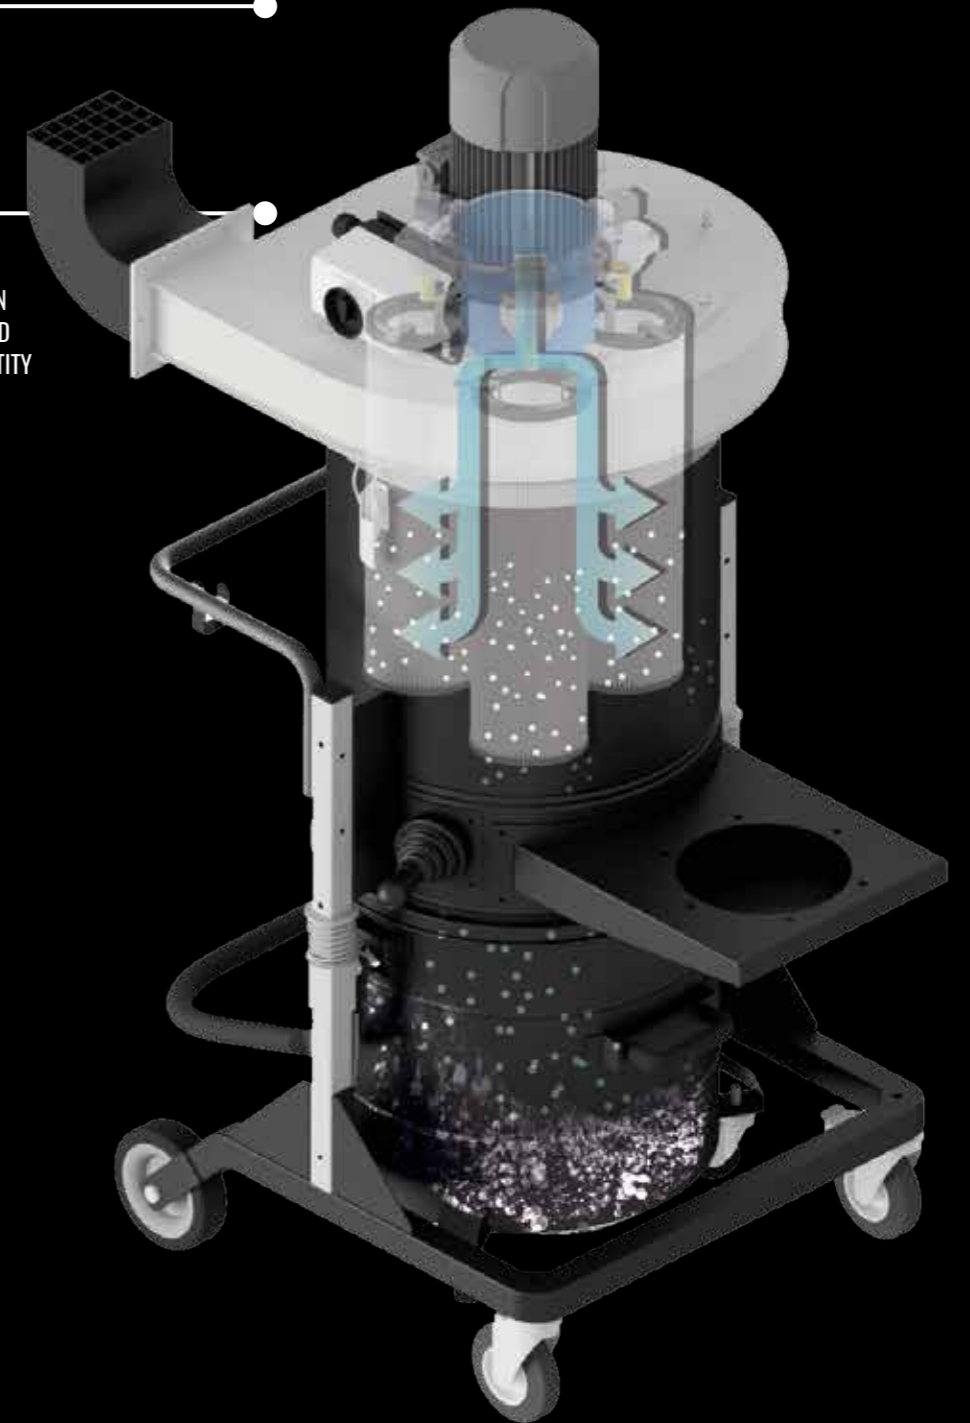

DF075



DF075

DF22



DF22

| | | |
|---------------------------------|-------|-------------------------------------|
| POWER | kW-HP | 0,75 - 1 |
| VOLTAGE FREQUENCY | V Hz | 400 50/60 |
| MAXIMUM VACUUM | mmH2O | 180 160 130 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 180 150 123 |
| MAXIMUM AIR FLOW | m³/h | 400 800 1000 |
| INLET | Ø mm | 70 100 120 |
| SURFACE AREA | cm² | 24.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 / 100 |

| | | |
|---------------------------------|-------|-------------------------------------|
| POWER | kW-HP | 2,2 - 3 |
| VOLTAGE FREQUENCY | V Hz | 400 50/60 |
| MAXIMUM VACUUM | mmH2O | 352 350 350 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 340 320 280 |
| MAXIMUM AIR FLOW | m³/h | 800 1000 1400 |
| INLET | Ø mm | 100 120 150 |
| SURFACE AREA | cm² | 24.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 / 100 |

STANDARD M CLASS STAR FILTER
SUITABLE FOR EVERY NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



**ABSOLUTE FILTER
HEPA H14**

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DF40



DF40

DF55



DF55

| | | |
|---------------------------------|-------------------|-------------------------------------|
| POWER | kW-HP | 4 - 5,5 |
| VOLTAGE FREQUENCY | V Hz | 400 50/60 |
| MAXIMUM VACUUM | mmH2O | 370 340 270 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 300 270 200 |
| MAXIMUM AIR FLOW | m ³ /h | 1500 2100 2700 |
| INLET | Ø mm | 150 180 200 |
| SURFACE AREA | cm ² | 45.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 |

| | | |
|---------------------------------|-------------------|-------------------------------------|
| POWER | kW-HP | 5,5 - 7,5 |
| VOLTAGE FREQUENCY | V Hz | 400 / 50 - 60 |
| MAXIMUM VACUUM | mmH2O | 517 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 480 |
| MAXIMUM AIR FLOW | m ³ /h | 2700 |
| INLET | Ø mm | 200 |
| SURFACE AREA | cm ² | 45.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 175 |

STANDARD M CLASS STAR FILTER
SUITABLE FOR EVERY NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



SUCTION
ARM

ABSOLUTE FILTER
HEPA H14

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DF075



DF075

Z22



DF22



DF22

Z22



| | | |
|---------------------------------|-------------------|-------------------------------------|
| POWER | kW-HP | 0,75 - 1 |
| VOLTAGE FREQUENCY | V/Hz | 400 / 50 - 60 |
| MAXIMUM VACUUM | mmH2O | 340 220 280 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 180 160 130 |
| MAXIMUM AIR FLOW | m ³ /h | 400 800 1000 |
| INLET | Ø mm | 70 100 120 |
| SURFACE AREA | cm ² | 24.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 / 100 |

| | | |
|---------------------------------|-------------------|-------------------------------------|
| POWER | kW-HP | 2,2 - 3 |
| VOLTAGE FREQUENCY | V/Hz | 400 / 50 - 60 |
| MAXIMUM VACUUM | mmH2O | 352 350 350 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 340 320 280 |
| MAXIMUM AIR FLOW | m ³ /h | 800 1000 1400 |
| INLET | Ø mm | 100 120 150 |
| SURFACE AREA | cm ² | 24.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 / 100 |

STANDARD M CLASS STAR FILTER
SUITABLE FOR EVERY NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



SUCTION
ARM

ABSOLUTE FILTER
HEPA H14

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DF40



DF40

Z22

DF55



DF55

Z22

| | | |
|---------------------------------|-------|-------------------------------------|
| POWER | kW-HP | 4 - 5,5 |
| VOLTAGE FREQUENCY | V/Hz | 400 / 50 - 60 |
| MAXIMUM VACUUM | mmH2O | 370 340 270 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 300 270 200 |
| MAXIMUM AIR FLOW | m³/h | 1500 2100 2700 |
| INLET | Ø mm | 150 180 200 |
| SURFACE AREA | cm² | 45.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 65 |

| | | |
|---------------------------------|-------|-------------------------------------|
| POWER | kW-HP | 5,5 - 7,5 |
| VOLTAGE FREQUENCY | V/Hz | 400 / 50 - 60 |
| MAXIMUM VACUUM | mmH2O | 517 |
| AVAILABLE STATIC INLET PRESSURE | mmH2O | 480 |
| MAXIMUM AIR FLOW | m³/h | 2700 |
| INLET | Ø mm | 200 |
| SURFACE AREA | cm² | 45.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) |
| BIN CAPACITY | Lt | 175 |

STANDARD M CLASS STAR FILTER
SUITABLE FOR EVERY NEEDS



PSC
SEMI-AUTOMATIC
PNEUMATIC
FILTER SHAKER



SP SYSTEM
AUTOMATIC
REVERSE
JET CLEANING
SYSTEM



SUCTION
ARM

ABSOLUTE FILTER
HEPA H14

FILTRATION EFFICIENCY
OF 99,995 % OVER 0,18 µ



3 YEARS WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

DISCHARGE SYSTEMS



BALANCED FLAP



DISCHARGE SYSTEMS




MANUAL DISCHARGE BUTTERFLY VALVE



DOUBLE ELECTRO PNEUMATIC DISCHARGING BUTTERFLY VALVE



ROTATING LEVEL SENSOR

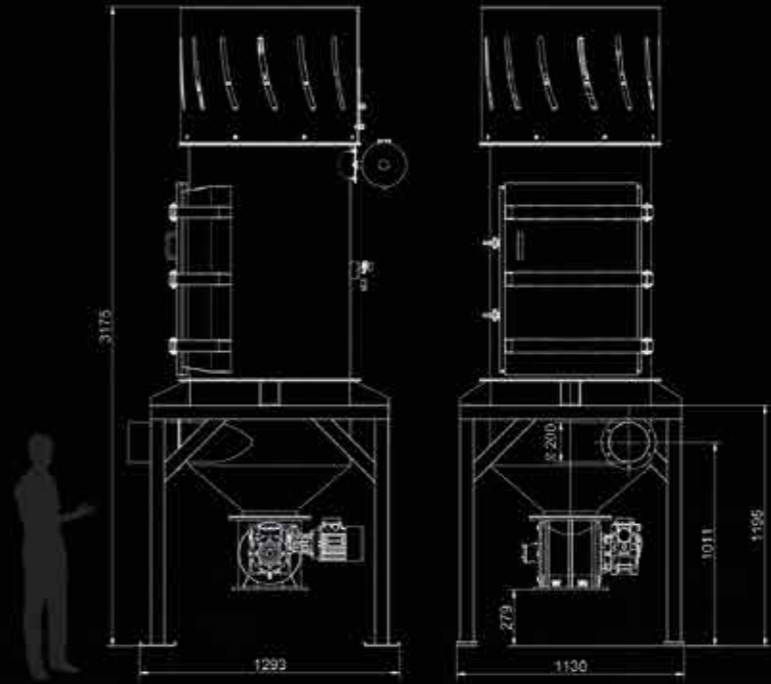

DV AIR FLOW

| | | DV-AIR AF 40 | DV-AIR AF 55 |
|---------------------------------|-------------------|-------------------------------------|-------------------------------------|
| POWER | kW-HP | 4 - 5,5 | 5,5 - 7,5 |
| VOLTAGE FREQUENCY | V Hz | 400 50/60 | 400 50/60 |
| MAXIMUM VACUUM | mm | 340 | 517 |
| AVAILABLE STATIC INLET PRESSURE | mm | 270 | 480 |
| MAXIMUM AIR FLOW | m ³ /h | 2200 | 2700 |
| INLET | Ø mm | 200 | 200 |
| SURFACE AREA | cm ² | 340.000 | 340.000 |
| FILTRATION EFFICIENCY | | CLASSE EN 60335-2-69 - M CLASS (1µ) | CLASSE EN 60335-2-69 - M CLASS (1µ) |



SP SYSTEM
AUTOMATIC REVERSE JET CLEANING SYSTEM



3 YEARS WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

FILTER SOLUTIONS

TYPE OF FILTERS

"M" CLASS STAR FILTER



FINE DUSTS, GRANULES, SHAVINGS AND DRY MATERIALS

ANTISTATIC "M" CLASS STAR FILTER



FINE DUSTS, GRANULES, SHAVINGS AND MATERIALS TENDING TO BE ELECTROSTATICALLY CHARGED. STANDARD ON ALL ATEX MODELS

NOMEX STAR FILTER



DUSTS AND SOLIDS WITH TEMPERATURES UNTIL 250°C

ACTIVATED CARBON FILTER




8KG ACTIVATED CARBON ELIMINATES BAD SMELLS

PTFE STAR FILTER



VERY FINE AND CLOGGING DUSTS, HYGROSCOPIC AND WET MATERIALS, CERTIFIED FOR FOOD

M CLASS CARTRIDGE

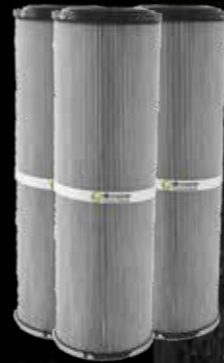


BIG QUANTITIES OF FINE AND CLOGGING DUSTS, AVAILABLE ON ALL SP VERSIONS, AUTOMATIC REVERSE JET CLEANING



FILTRATION EFFICIENCY OF 99,995 % OVER 0,18 µ

SUCTION ARMS

TYPE OF ARMS

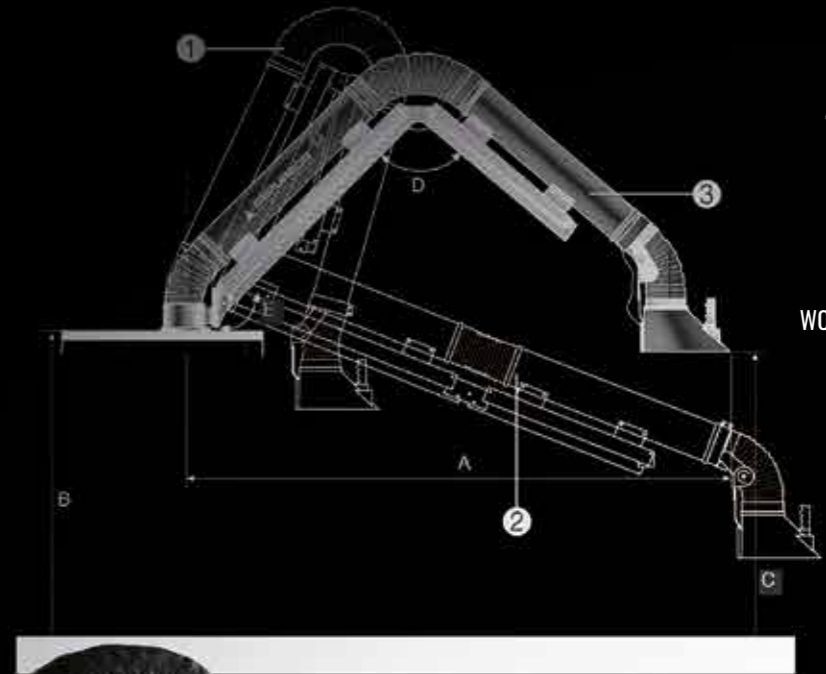

TROLLEY VERSION

CLOSED ARM 1
640 MM

OPEN ARM 2
2600 MM

WORKING POSITION 3
2300 MM

ARTICULATED ARM
L = 300 Ø160MM



ARTICULATED ARM
L = 300 Ø150MM

