



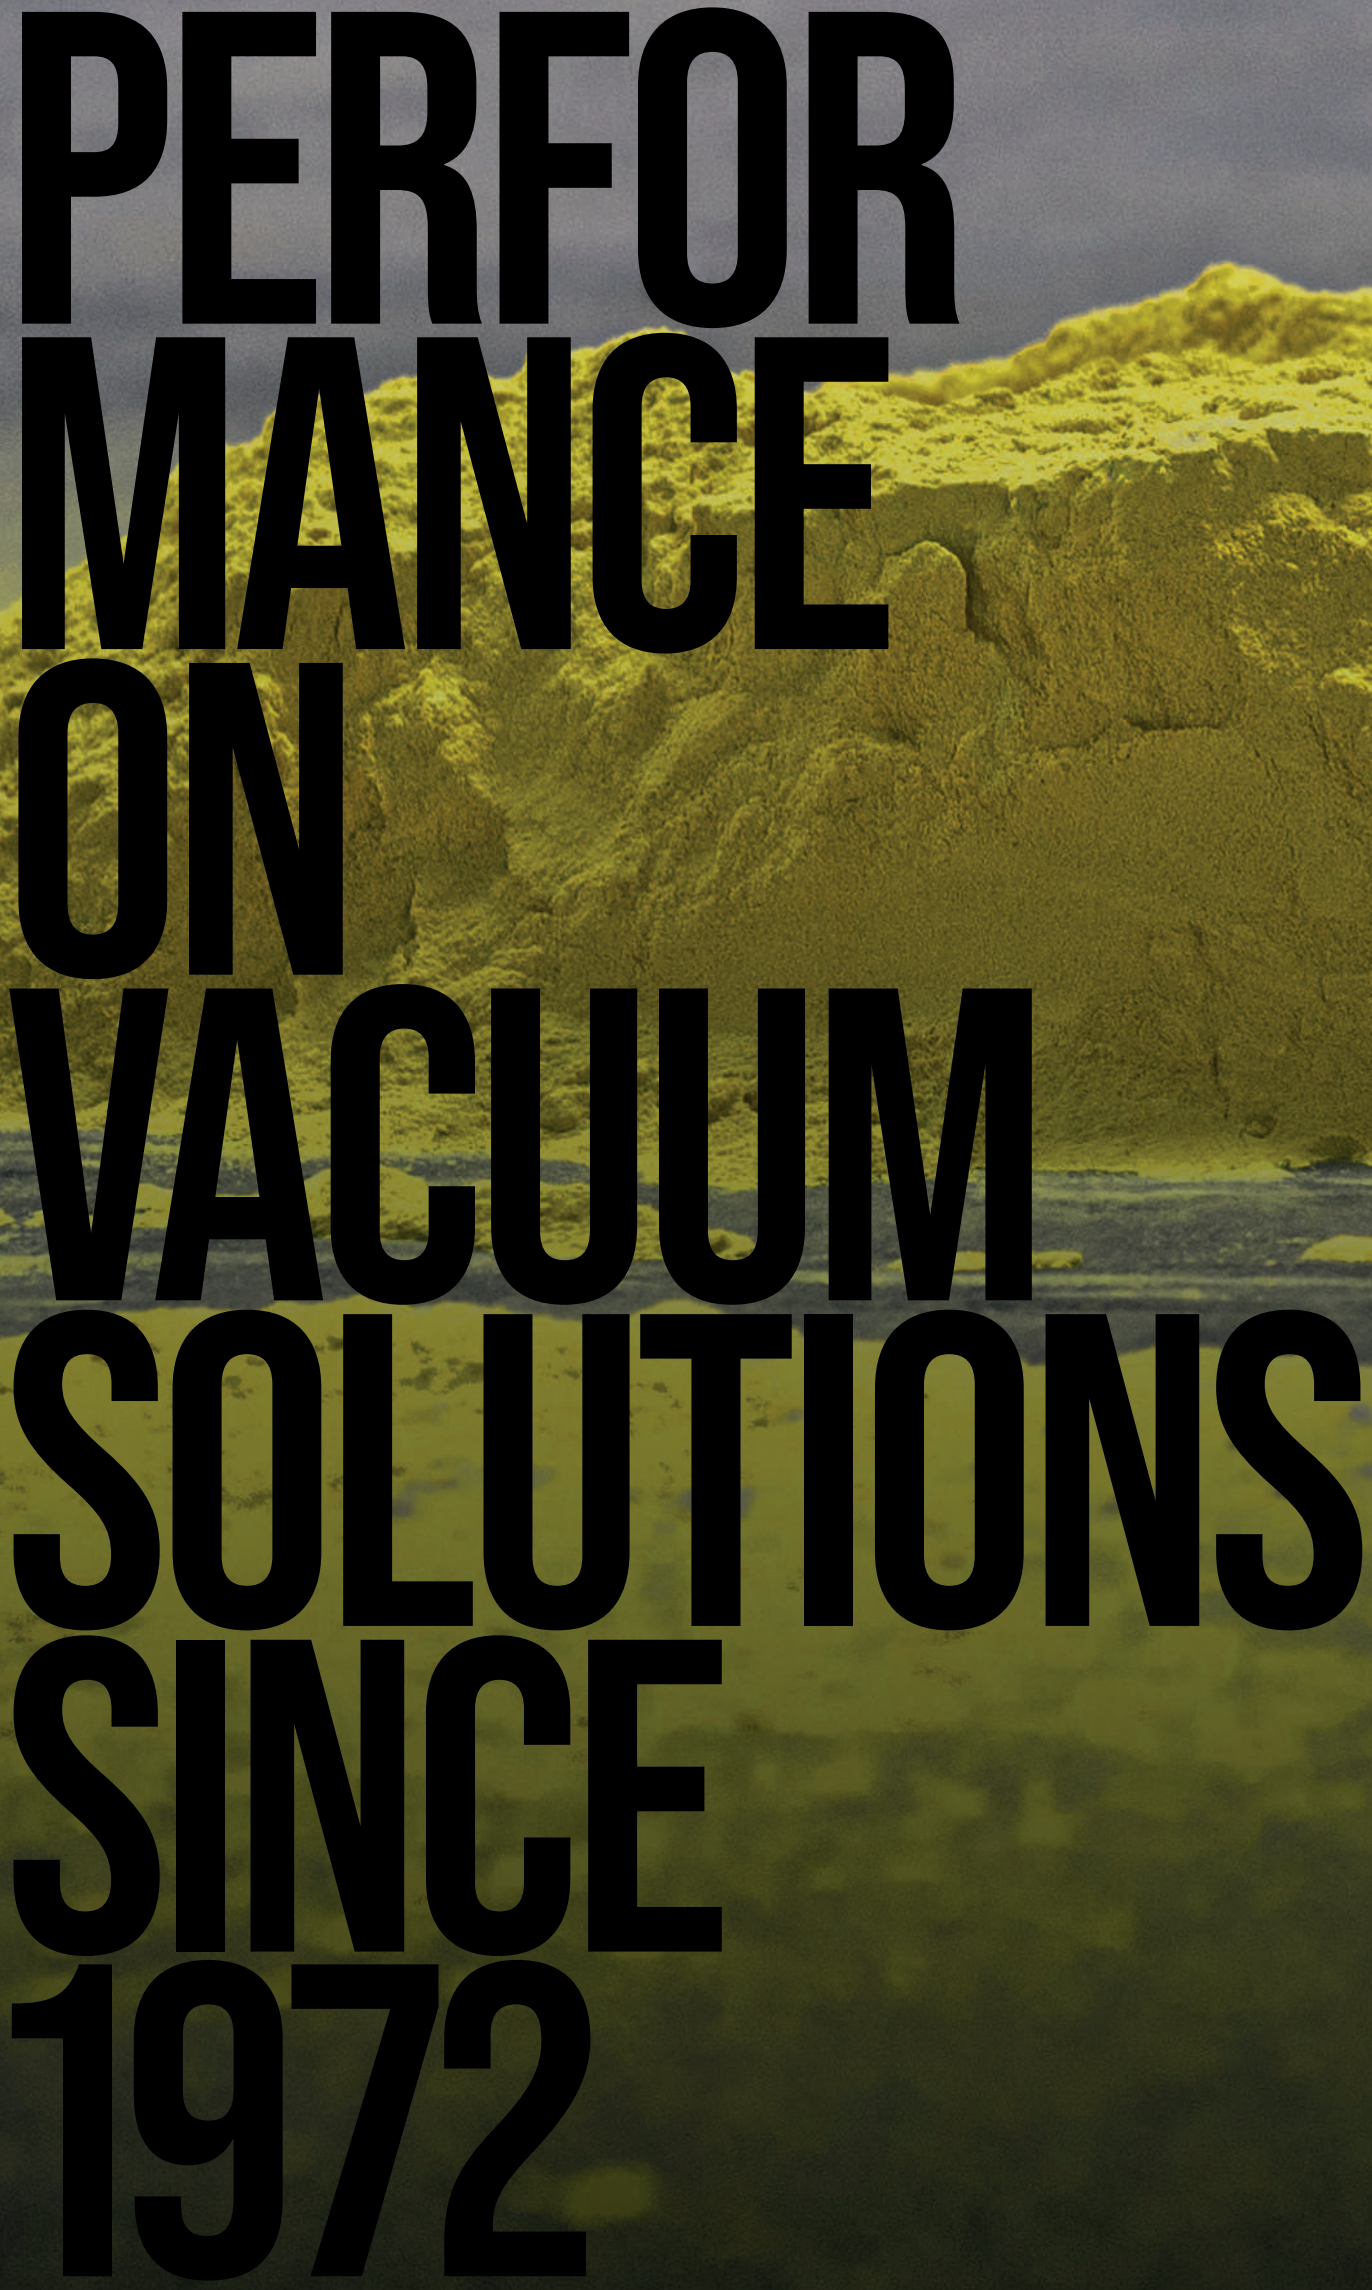

THREE PHASE INDUSTRIAL VACUUMS

A large, textured rock formation, possibly a sandstone cliff, dominates the background. The rock is illuminated by a warm, golden light, likely from the setting or rising sun, creating strong shadows and highlights that emphasize its craggy surface. The sky above is a pale, overcast blue-grey. The foreground shows a flat, sandy desert floor with some sparse, low-lying vegetation.

**PERFOR
MANCE
ON
VACUUM
SOLUTIONS
SINCE
1972**

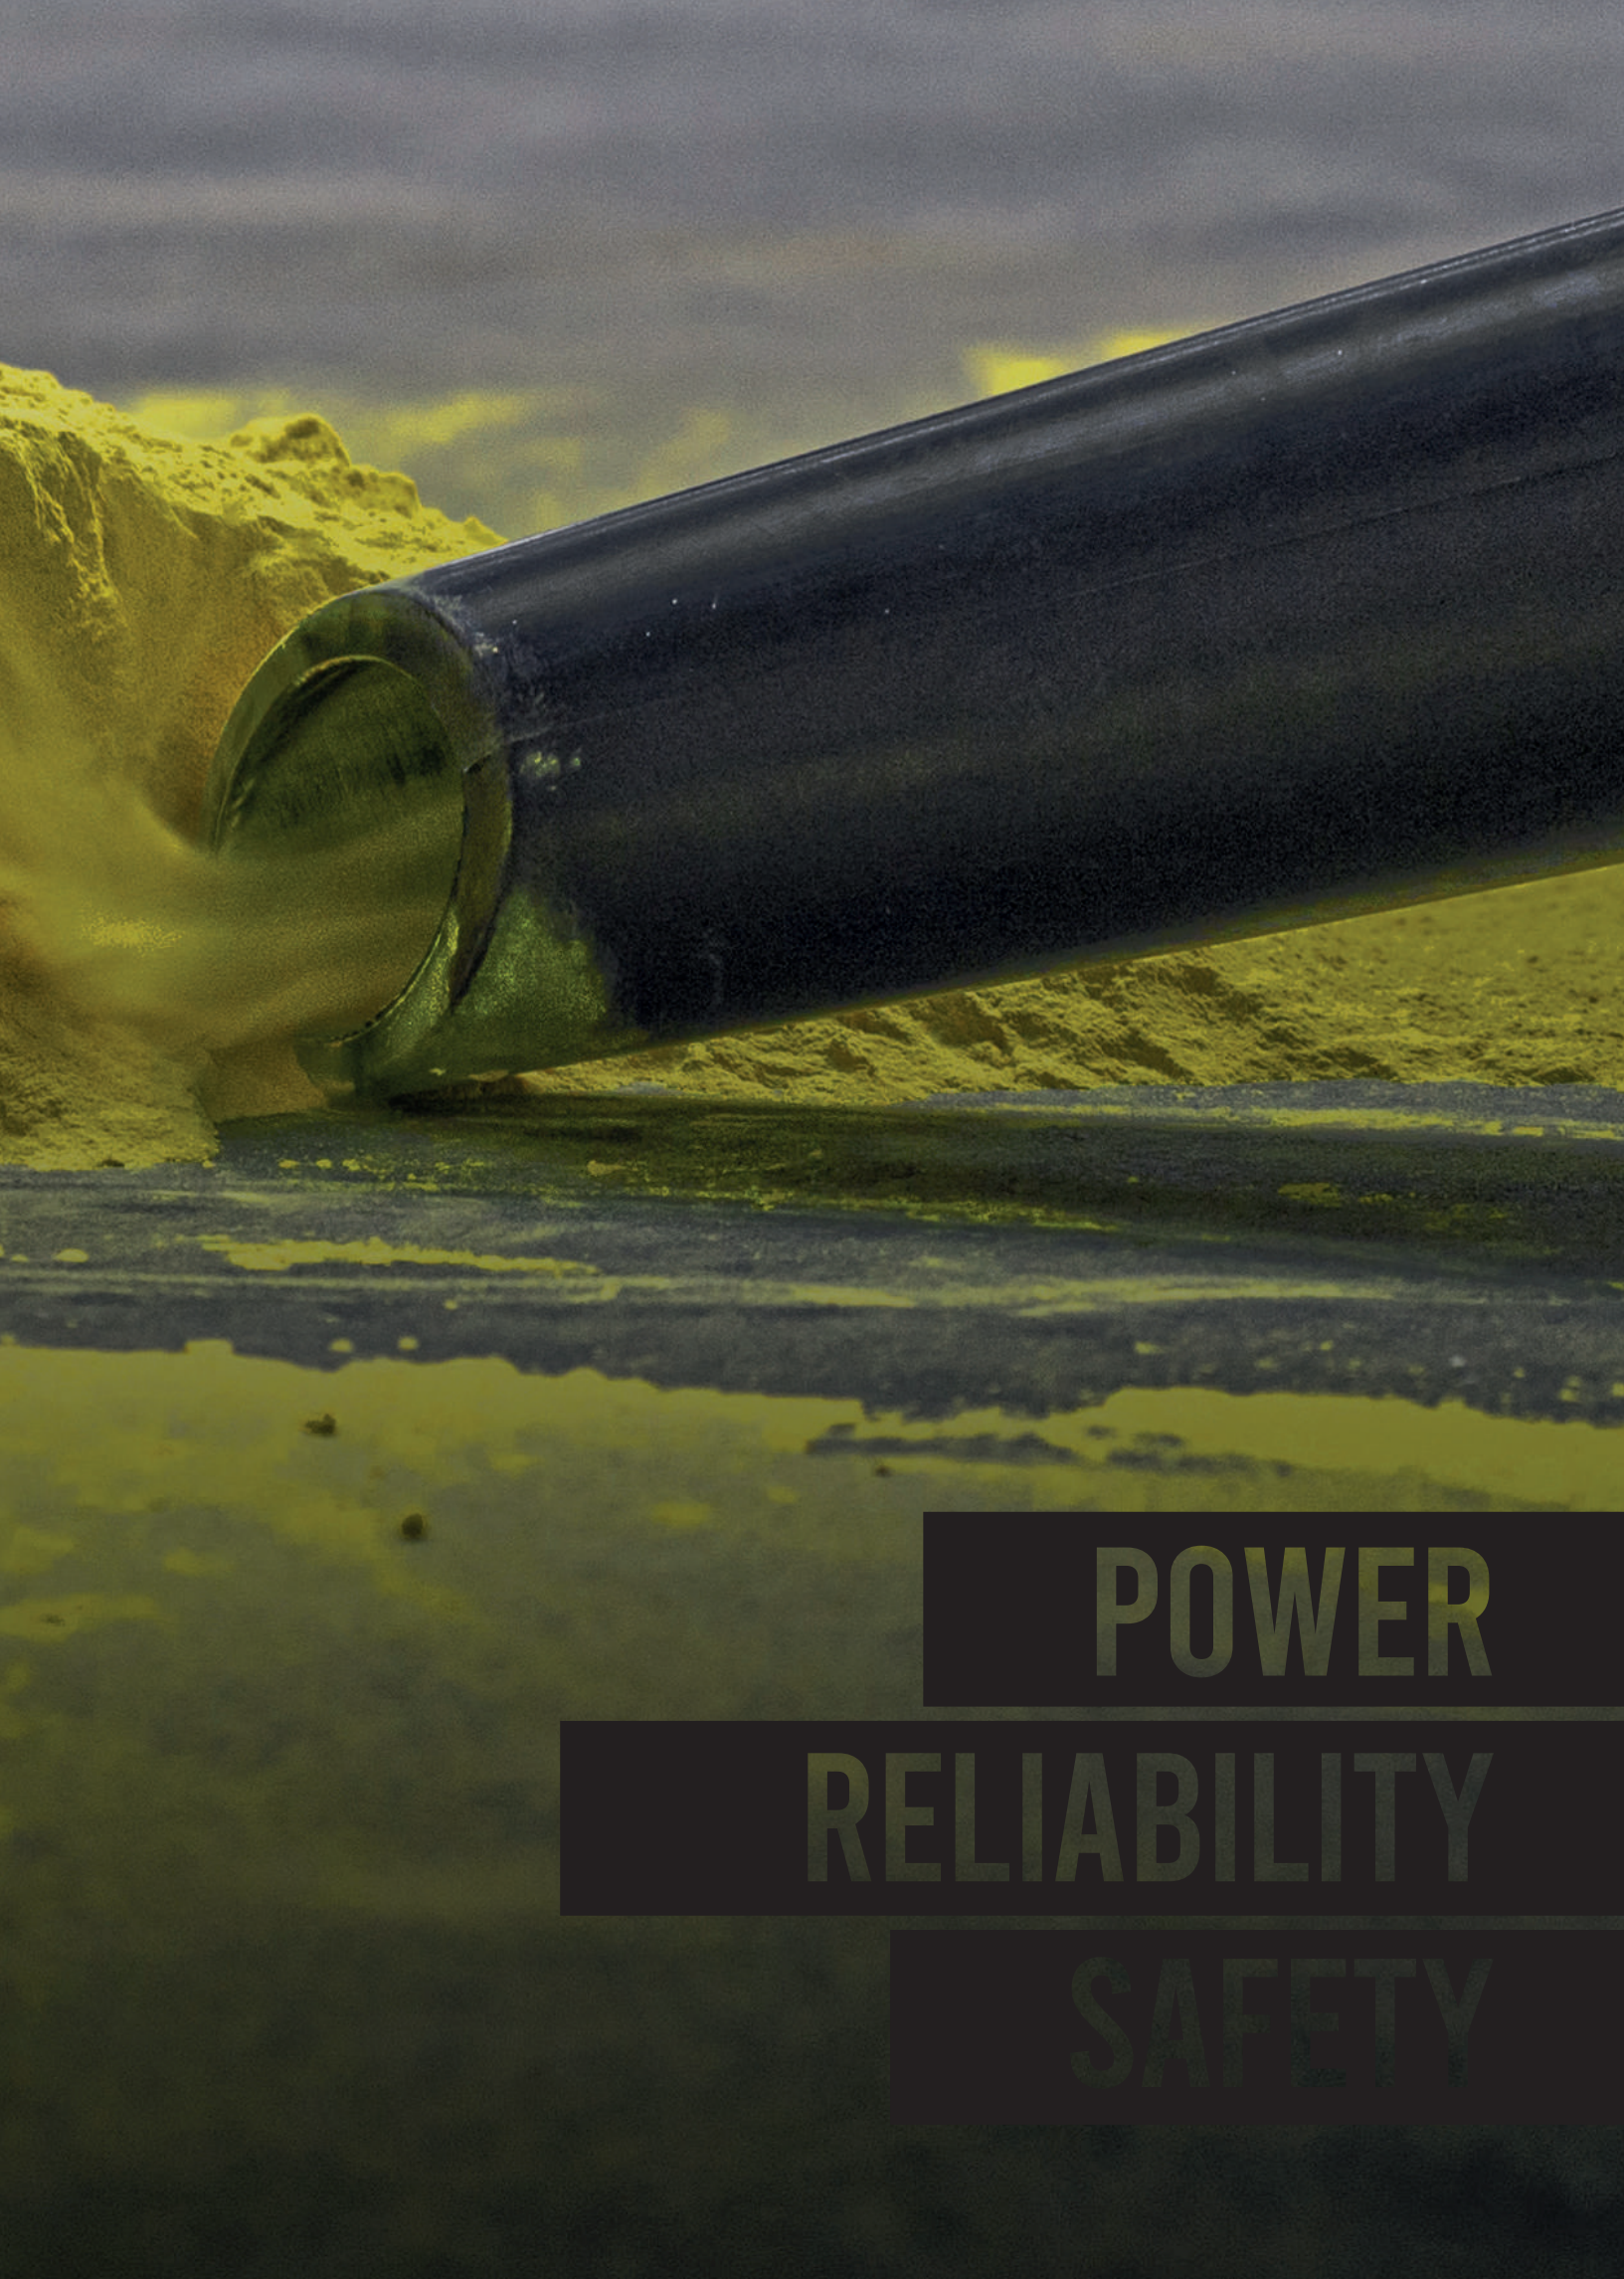

POWER

RELIABILITY

SAFETY

SIDE CHANNEL BLOWER


INLET

AIR

AIR


OUTLET

INDUCTION MOTOR
CAN WORK 24/7
MAINTENANCE FREE

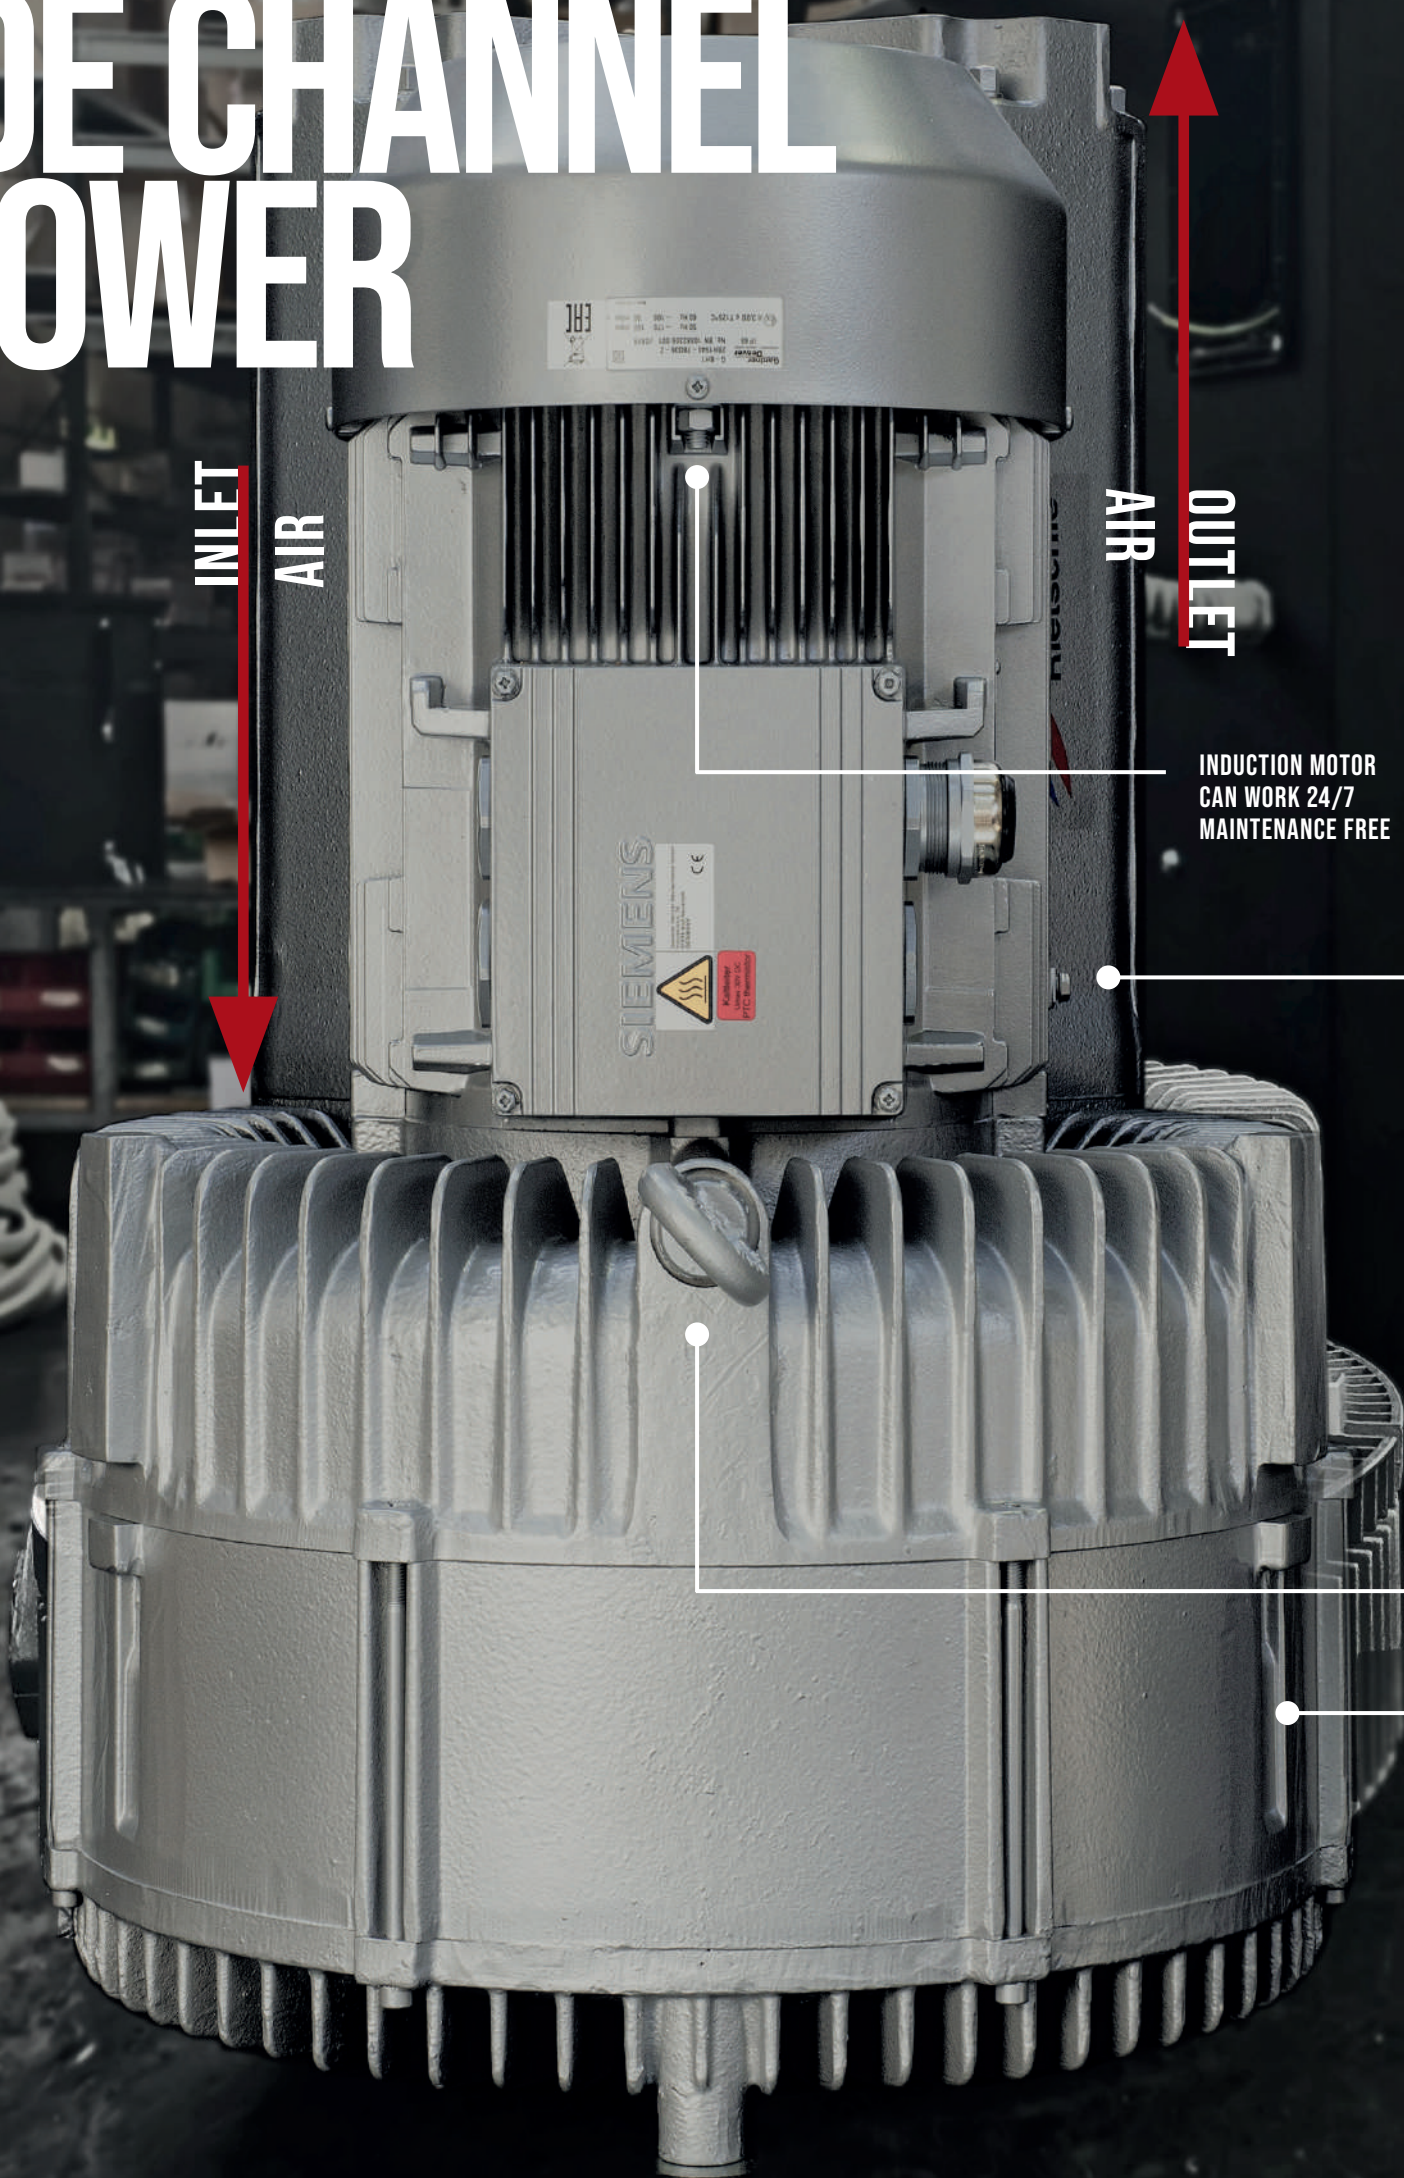

FEATURES

- FROM 1,8 kW TO 7,5 kW
- IMPRESSIVE DEPRESSION UNTIL 440 mBar
- BIG AIR FLOW UNTIL 730 m³/h
- 24/7 MAINTENANCE FREE
- LOW NOISE <76 DB(A)
- PROTECTION FROM IP 55 TO IP 68
- ONLY TOP BRANDS INSTALLED

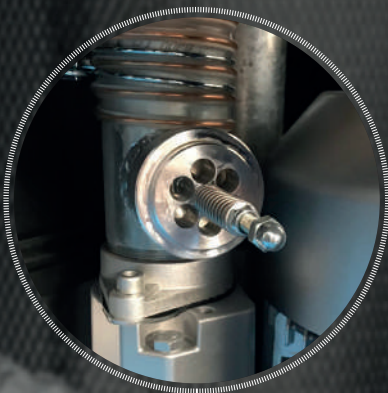

SAFETY VALVE

DIRECT CONNECTION
HIGH EFFICIENCY

S
SERIES SETTINGS
MORE DEPRESSION

P
PARALLEL SETTINGS
MORE AIRFLOW

SINGLE
STAGE

DOUBLE
STAGE



THE RIGHT FILTER FOR EVERY APPLICATION

POCKET FILTER

STANDARD M CLASS FILTER



FINE DUST, GRANULES, SOLID AND DRY SWARF

M CLASS ANTISTATIC FILTER



FINE DUST, GRANULES, SWARF AND SOLID MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON THE MODELS IN THE ATEX RANGE

NOMEX FILTER



DUST AND SOLID MATERIALS WITH TEMPERATURES UP TO 250°C

M CLASS TEFLON FILTER



FINE DUST, GRANULES, WET OR DUMP SWARF AND SOLID MATERIALS. ESPECIALLY SUITABLE FOR STICKY DUST

M CLASS PTFE FILTER



VERY FINE AND STICKY DUST, HYGROSCOPIC AND WET MATERIALS. FOOD CERTIFIED

M CLASS ANTISTATIC PTFE FILTER



HYGROSCOPIC MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON THE MODELS IN THE ATEX RANGE. FOOD CERTIFIED

CARTRIDGE FILTER



M CLASS - FILTRATION EFFICIENCY 1 μ (EN60335269)

FILTER SURFACE UP TO 35.000 CM²

JETCLEAN® FILTER CLEANING SYSTEM


ANTISTATIC POLYESTER ALUMINATED FILTER

ESPECIALLY SUITED FOR DRY, FINE AND VERY FINE DUST



CLASS H14 EN - 1822
 EFFICIENCY 99,995% ON 0,18µ
 VERY FINE, DANGEROUS DUST WITH
 PARTICLE SIZE <1µ

ABSOLUTE FILTER

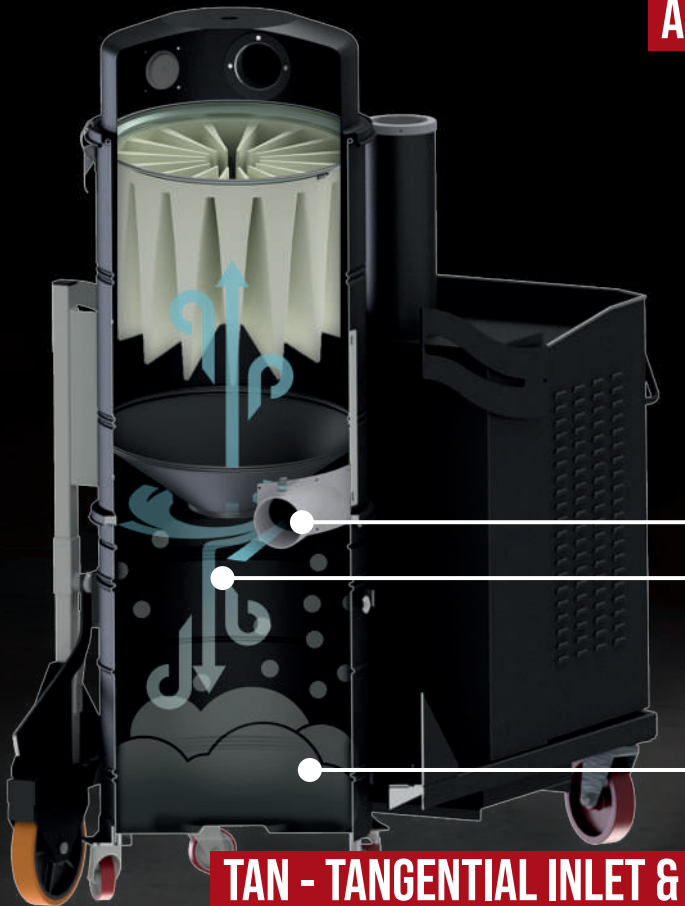

THE MATERIAL ENTERS INTO THE
 CHAMBER FROM THE TANGENTIAL
 SUCTION INLET

THE MATERIAL LOSES SPEED
 THANKS TO THE FRICTION
 AGAINST THE CYCLONE.

THE CYCLONE SYSTEM DROPS DOWN
 UNTIL 90% OF THE MATERIAL VACUUMED
 KEEPING THE FILTER CLEAN AND GRANTING
 IT A LONGER LIFE

THE MATERIAL SETTLES DOWN
 IN THE VACUUM'S BIN

TAN - TANGENTIAL INLET & CYCLONE




M CLASS FILTER INCLUDED

ON ALL THREEPHASE RANGE THE M CLASS FILTER IS INCLUDED
 THE M CLASS FILTER HAS A FILTRATION EFFICIENCY OF 1µ,
 ALLOWING TO VACUUM EVEN FINER DUST IN COMPLETE SAFETY

CLEANING THE FILTER IS IMPORTANT




SIMPLE AND EFFICIENT

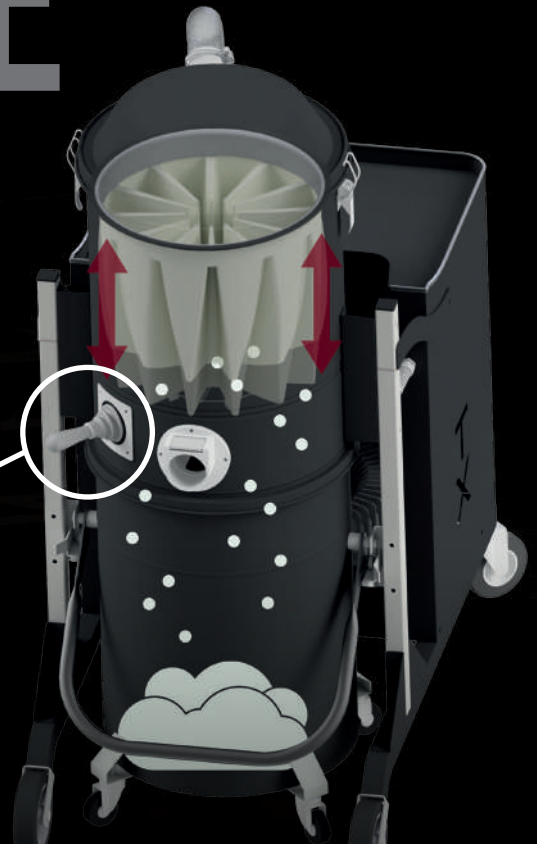


MANUAL FILTER SHAKER

- IDEAL FOR DRY AND HUMID DUST
- EXCELLENT TO REMOVE SWarf AND SOLID MATERIALS FROM THE FILTER
- PRACTICAL AND SIMPLE

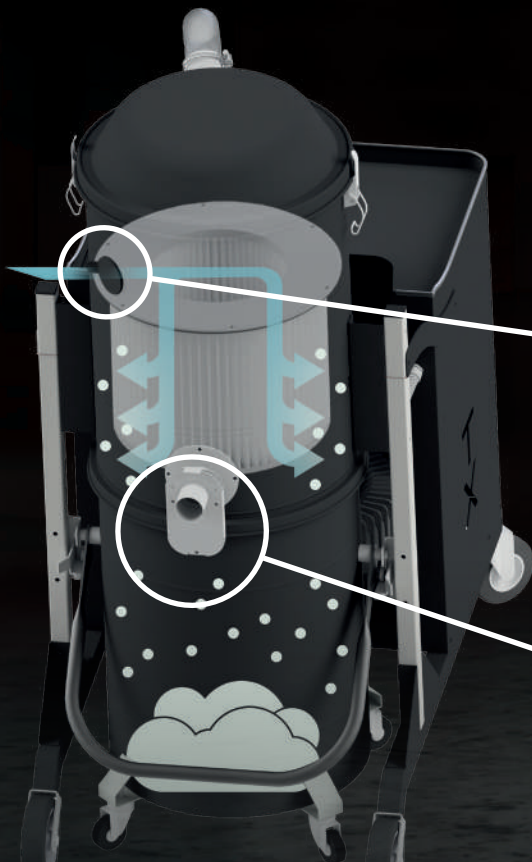

OPEN AND CLOSE THE METAL FLAP THREE TIMES



SLIDE THE DAMPER UP



SLIDE THE DAMPER DOWN

JETCLEAN[®] SYSTEM

- TO CLEAN THE FILTER WITHOUT STOPPING THE VACUUMING
- INCREASED CLEANING EFFICIENCY UP TO 30% OR HIGHER
- IDEAL FOR FINE AND DIFFICULT DUST

SP SYSTEM


- THE SP SYSTEM IS PERFECT FOR HIGH QUANTITIES OF FINE AND DIFFICULT DUST.
- THE CLEANING SYSTEM IS TOTALLY AUTOMATIC.
- IT IS JUST NECESSARY TO CONNECT COMPRESSED AIR AT 6 BAR TO THE VACUUM CLEANER.
- IF THE COMPRESSED AIR IS NOT AVAILABLE IT IS POSSIBLE TO INSTALL A COMPRESSOR ON BOARD

COMPRESSOR ON BOARD
AVAILABLE ON DEMAND



THE SP SYSTEM PERMITS TO KEEP THE FILTERS CLEAN AUTOMATICALLY WITHOUT STOPPING THE VACUUM. EACH FILTER IS PERIODICALLY CLEANED BY HIGH PRESSURE AIR FLOW (6 BAR)

THE SP SYSTEM IS MANAGED BY AN ELECTRONIC PROGRAMMER INSTALLED ON BOARD. THANKS TO THE TOUCH SCREEN PANEL IT IS POSSIBLE TO SET THE FILTER CLEANING TIME CYCLE AND ALSO TO SET THE SYSTEM DEPENDING ON THE QUANTITY AND TYPE OF DUST

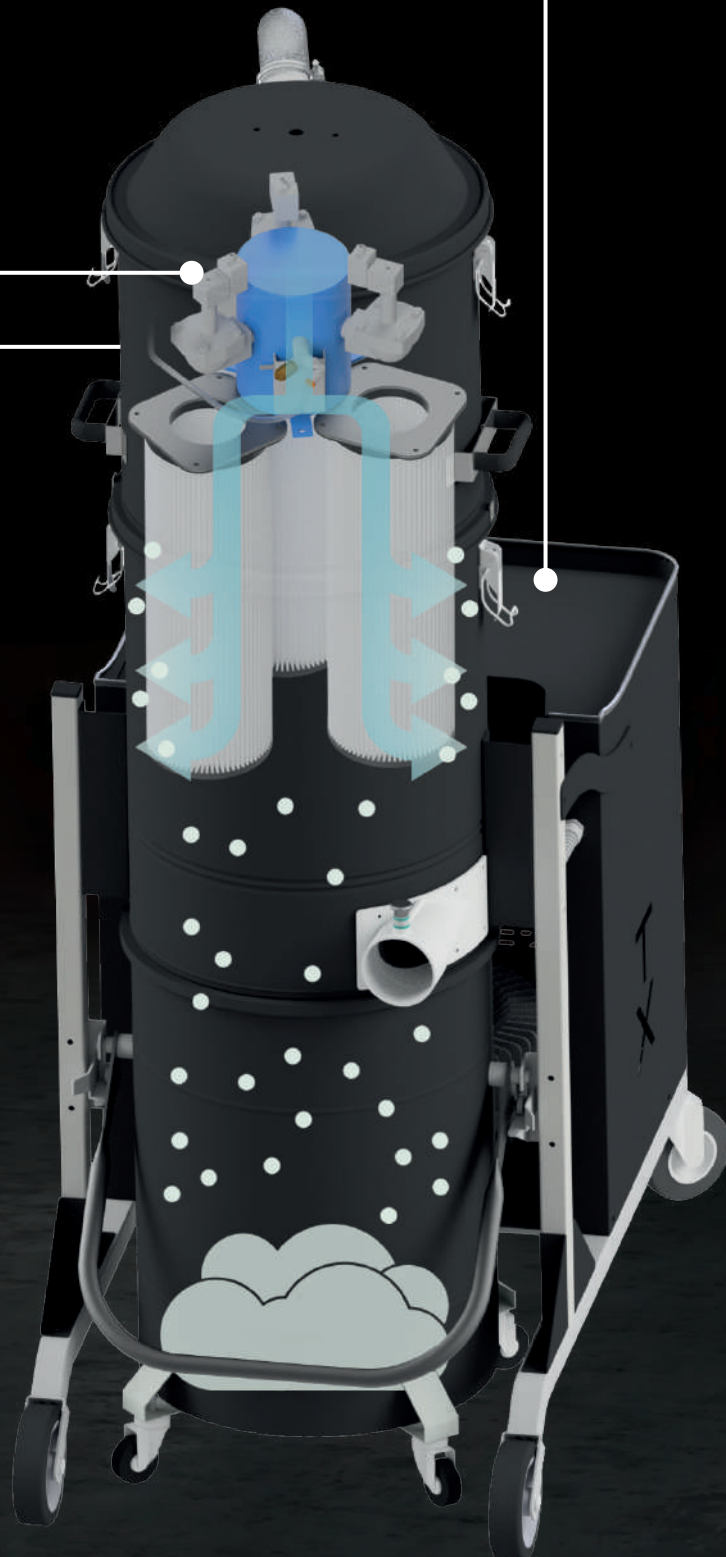

TB



COMPACT

DURABLE

SAFE

- MANUAL FILTER SHAKER
- CERTIFIED M CLASS FILTER
- STURDY, SAFE, SUITABLE FOR EVERY NEED
- IDEAL FOR DUST, GRANULES AND SWarf
- PRACTICAL DETACHABLE BIN
- UP TO 45 LT CAPACITY
- AVAILABLE WITH LONGOPAC®
- INLET WITH DEFLECTOR



		TB18 M	TB22
POWER	kW-HP	1,8 - 2,4	2,2 - 3
VOLTAGE FREQUENCY	V Hz	230 / 50-60	400 / 50-60
MAXIMUM VACUUM	mBar	280	250
MAXIMUM AIR FLOW	m ³ /h	250	280
INLET	mm	70	70
FILTER SURFACE	cm ²	15.000	15.000
FILTER EFFICIENCY		M CLASS (1μ)	M CLASS (1μ)
CAPACITY	Lt	45	45



STANDARD M CLASS POCKET FILTER
SUITABLE FOR EVERY NEED



ABSOLUTE FILTER

AVAILABLE FOR THE WHOLE RANGE
99,995 % ON 0,18
FILTRATION EFFICIENCY



TB UP



MOBILE

COMPACT

SILENT

- MANUAL FILTER SHAKER
- CERTIFIED M CLASS FILTER
- STURDY, SAFE, SUITABLE FOR EVERY NEED
- IDEAL FOR DUST, GRANULES AND SWARF
- PRACTICAL DETACHABLE BIN
- UP TO 45 LT CAPACITY
- AVAILABLE WITH LONGOPAC®
- COMPACT
- DURABLE



		1PH	3	4
POWER	kW-HP	2,2 - 3	3 - 4	4 - 5,5
VOLTAGE FREQUENCY	V/Hz	230 / 50-60	400 / 50-60	400 / 50-60
MAXIMUM VACUUM	mBar	230	310	310
MAXIMUM AIR FLOW	m ³ /h	350	420	320
INLET	Ø mm	70	70	70
FILTER SURFACE	cm ²	15.000	15.000	15.000
FILTER EFFICIENCY		M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)
CAPACITY	Lt	45	45	45



SP SYSTEM


AUTOMATIC REVERSE AIR
JET FILTER CLEANING
AVAILABLE ON DEMAND

3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE DEAL OF AN EXTENDED WARRANTY

ECOBULL



COMPACT

DURABLE

SAFE

- MANUAL FILTER SHAKER
- CERTIFIED M CLASS FILTER
- SIEMENS TURBINE
- STURDY, SAFE, SUITABLE FOR EVERY NEED
- IDEAL FOR DUST, GRANULES AND SWARF
- PRACTICAL DETACHABLE BIN
- UP TO 100 LT CAPACITY
- AVAILABLE WITH LONGOPAC®
- INLET WITH DEFLECTOR



		1PH	3PH
POWER	kW-HP	2,2 - 3	3 - 4
VOLTAGE FREQUENCY	V Hz	230 / 50 - 60	400 / 50 - 60
MAXIMUM VACUUM	mBar	230	310
MAXIMUM AIR FLOW	m ³ /h	350	420
INLET	Ø mm	70	70
FILTER SURFACE	cm ²	24.000	24.000
FILTER EFFICIENCY		M CLASS (1µ)	M CLASS (1µ)
CAPACITY	Lt	65/100	65/100



STANDARD M CLASS POCKET FILTER
SUITABLE FOR EVERY NEED



STANDARD M CLASS ANTISTATIC

NOMEX

M CLASS ANTISTATIC

PTFE

PTFE ANTISTATIC




ABSOLUTE FILTER

AVAILABLE FOR THE WHOLE RANGE
99,995 % ON 0,18
FILTRATION EFFICIENCY



TX



STRONG

RELIABLE

SMART

- FROM 3 TO 7,5 KW
- CERTIFIED M CLASS FILTER
- POSSIBLE TO INSTALL JETCLEAN® OR SP AUTOMATIC REVERSE JET CLEANING SYSTEM
- STURDY, SAFE, SUITABLE FOR EVERY NEED
- IDEAL FOR DUST, DEBRIS AND SWARF
- PRACTICAL DETACHABLE BIN
- UP TO 100 LT CAPACITY
- AVAILABLE WITH LONGOPAC®
- INLET WITH DEFLECTOR
- 38.000 cm² FILTER SURFACE



		TX 300	TX 400 P	TX 400 S	TX 550 P	TX 550 S	TX 750
POWER	kW-HP	3 - 4	4 - 5,5	4 - 5,5	5,5 - 7,5	5,5 - 7,5	7,5 - 10
VOLTAGE FREQUENCY	V Hz	400 / 50 - 60	400 / 50 - 60	400 / 50 - 60	400 / 50 - 60	400 / 50 - 60	400 / 50 - 60
MAXIMUM VACUUM	mBar	310	250	430	330	510	330
MAXIMUM AIR FLOW	m³/h	420	530	330	530	330	730
INLET	Ø mm	70	70	70	70	70	70
FILTER SURFACE	cm²	38.000	38.000	38.000	38.000	38.000	38.000
FILTER EFFICIENCY		M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)
CAPACITY	Lt	100	100	100	100	100	100



SP SYSTEM

AUTOMATIC REVERSE AIR
JET FILTER CLEANING
AVAILABLE ON DEMAND

3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE **DEAL** OF AN **EXTENDED WARRANTY**

FOX



POWERFUL

RELIABLE

VERSATILE

- FROM 3 TO 7,5 KW
- CERTIFIED M CLASS FILTER
- POSSIBLE TO INSTALL JETCLEAN® OR SP AUTOMATIC REVERSE JET CLEANING SYSTEM
- STURDY, SAFE, SUITABLE FOR EVERY NEED
- IDEAL FOR DUST, DEBRIS AND SWARF
- PRACTICAL DETACHABLE BIN
- UP TO 100 LT CAPACITY
- AVAILABLE WITH LONGOPAC®
- TANGENTIAL INLET
- CYCLONE INCLUDED



FOX 5.5 P

FOX 5.5 S

FOX 7.5 P

FOX 7.5 S

		FOX 5.5 P	FOX 5.5 S	FOX 7.5 P	FOX 7.5 S
POWER	kW-HP	4 - 5,5	4,3 - 5,8	5,5 - 7,5	5,5 - 7,5
VOLTAGE FREQUENCY	V Hz	400 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60
MAXIMUM VACUUM	mBar	250	430	310	510
MAXIMUM AIR FLOW	m³/h	520	320	520	320
INLET	Ø mm	80	80	80	80
FILTER SURFACE	cm²	24.000	24.000	24.000	24.000
FILTER EFFICIENCY		M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)	M CLASS (1µ)
CAPACITY	Lt	100	100	100	100



SP SYSTEM

AUTOMATIC
REVERSE AIR
JET FILTER CLEANING
AVAILABLE ON DEMAND



ABSOLUTE FILTER

AVAILABLE FOR
THE WHOLE RANGE
99,995 % ON 0,18
FILTRATION EFFICIENCY



3 YEARS

WARRANTY

ORDER ALL REPLACEMENT FILTERS ALONG WITH THE VACUUM CLEANER
GET THE **DEAL** OF AN **EXTENDED WARRANTY**

ACCESSORIES

CONVENIENT SOLUTIONS TO HELP YOU WITH YOUR WORK



TILTTABLE BIN EMPTYING KIT



CYCLONE HOPPER
ON WHEELS



TILTTABLE 580 LT
SEPARATOR



WET & DRY SEPARATOR


THE RIGHT ACCESSORY FOR EVERY NEED



DOUBLE BEND TUBE FOR FLOOR
BRUSH



FLOOR BRUSH WITH
BRISTLES



FLOOR SQUEEGEE WITH RUBBER
STRIPS



SCRAPING PIPE



PIPE WITH HANDLE



ANTISTATIC RUBBER CONIC SECTION



OIL PROOF CONIC
SECTION



SILICONE CONIC SECTION



ANTISTATIC SWEEPER
NOZZLE



ANTISTATIC BRUSH
WITH BRASS BRISTLES



ANTISTATIC RUBBER BRUSH WITH
BRASS BRISTLES



PVC ROUND BRUSH



ANTISTATIC BENT RUBBER CONE




PIPE CLEANING BRUSH



ANTISTATIC FLAT PIPE

FLEXIBLE HOSES FOR ALL MATERIALS



BLACK EVAFLEX HOSE



BLACK EVAFLEX ELECTROCONDUCTIVE HOSE



POLYURETHANE FLEXIBLE HOSE



REINFORCED ABRASIVE PROOF POLYURETHANE
FLEXIBLE HOSE



ANTISTATIC POLYURETHANE FLEXIBLE
HOSE

#JUSTOBEFORE

DEPURECO INDUSTRIAL VACUUMS SRL

CORSO VENEZIA, 32 - 10088 VOLPIANO (TO) ITALIA
TEL. +39 011 98.59.117 FAX. +39 011 98.59.326
C.F. E P.I. 02258610357
DEPURECO@DEPURECO.COM WWW.DEPURECO.COM

