

PNEUMATIC INDUSTRIAL VACUUM CLEANERS

WD AIR

COMPRESSED AIR WET VACUUM



APPLICATION
Liquids




CAPACITY
130Lt

FEATURES

- 130 liters of liquid collection capacity
- High-strength steel construction
- Dual of interchangeable liquid/solid filtration system
- Powered by compressed air

HIGHLIGHTS

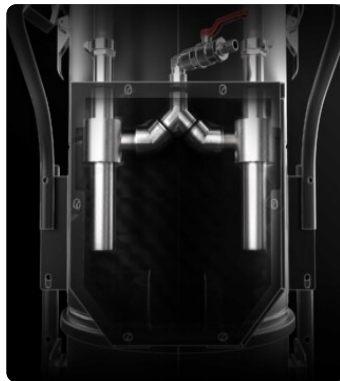

SUCTION UNIT

Suction is generated by two ejectors which generate, without the use of mechanical elements, a considerable vacuum inside the chamber, thus making suction possible.



DUST/LIQUID FILTRATION KIT

Supplied with two washable filters, one polypropylene for liquid suction and one polyester for dust suction.



COLLECTION UNIT

The material is collected inside a large coated steel container that is easy to move thanks to the 4 sturdy wheels.



LIQUID DISCHARGE VALVE

A ball valve located at the bottom of the container allows the collected liquids to be easily discharged by gravity.

TECHNICAL DATA

MOTOR

Typologies	Venturi ejector
Vacuum in continuous run	500 mBar
Maximum air flow	250 m ³ /h
Noise level	78 dB(A)
Air required	2500 lt/min
Pressure requirement	6 - 8 Bar

MACHINE

Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	130 Lt
Liquid discharge system	Discharge valve
Dimensions	660 x 800 mm
Height	1200 mm
Weight	62 Kg

FILTRATION

Primary filter type	Bag
EN 60335-2-69 filtration class	M
Media	Polyester
Additional filter	Anti-foam filter

FEATURES



DEFLECTOR
Internal deflector to protect the filter



PUSH HANDLE



COMPRESSED AIR SUPPLY VALVE



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction



FLT
Floater device

OPTIONS

STRUCTURE AND OPTIONS



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



BX
Stainless steel bin AISI 304



GRD
Grounding

ACCESSORIES

**P10867****IRON REDUCER Ø 70/40MM**

Reducer for vacuum quick fitting in galvanised steel 70/40 mm diameter

**P10866****IRON REDUCER Ø 70/50MM**

Reducer for vacuum quick fitting in galvanised steel 70/50 mm diameter

**P13639****WET & DRY KIT Ø 40MM**

Kit containing specific accessories for 40 mm diameter solids and liquids vacuuming

**P11887****WET & DRY KIT Ø 50MM**

Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming