

SINGLE-PHASE WET&DRY INDUSTRIAL VACUUM CLEANERS

XM 35 JC LP

INDUSTRIAL VACUUM FOR SURFACE PREPARATION



Watch the video!



POWER
2,6 kW - 3,5 HP



APPLICATION
Toxic or hazardous dusts



COLLECTION SYSTEM
Endless bag

FEATURES

- Designed for fine dust extraction
- Compact and easy to handle
- Large surface area M-class filter with integrated Jet Clean cleaning
- Endless Bag collection to avoid contact with dust

HIGHLIGHTS




SUCTION UNIT

Suction is provided by 2 by-pass motors controlled by independent switches, allowing the operator to control suction performance. The motors are located inside a robust enclosure, with an insulating sponge to maintain a low noise level.



FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

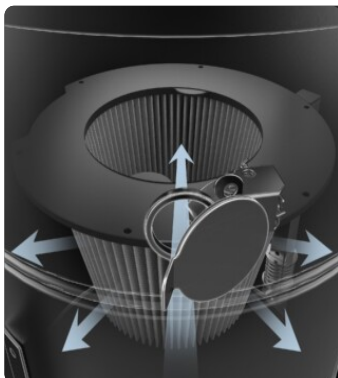

JET CLEAN FILTER CLEANING SYSTEM

Equipped with JetClean® filter cleaning system. Due to the different pressure between the outside and inside of the vacuum cleaner, the system generates a flow of air through the cartridge that detaches dust from the surface of the filter, keeping the filter efficient while working and without stopping suction.



COLLECTION UNIT

The material is collected inside a sturdy 20-meter-long adjustable roll plastic bag. Once the bag is filled, simply seal and remove it, with no contact between operator and material.

TECHNICAL DATA

MOTOR

Typologies	By-pass
Power	2,6 kW - 3,5 HP
Frequency	50/60 Hz
Voltage	230 V
Vacuum in continuous run	250 mBar
Maximum air flow	380 m3/h
Noise level	72 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	Endless Bag
Dimensions	585 x 545 mm
Height	1395 mm
Weight	45 Kg

FILTRATION

Primary filter type	Cartridge
Filter surface	16000 cm2
EN 60335-2-69 filtration class	M
Media	PTFE coated polyester
Filter Cleaning System	Jet Clean
JetClean Guillotine	Included

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



HEPA 13
Absolute filter (EN 1822)
35.000 cm² filter surface
H13 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS




60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum




ACCESSORY HOLDER



AB
Accessories basket



RC SCHUKO
Remote control by power tool (MAX 2000 W)



GRD
Grounding

ACCESSORIES



P12350
STARTER KIT Ø 50MM

A compact, essential solution for quick vacuuming on simple surfaces. - 3-meter Evaflex hose - 2 antistatic rubber sleeves - Flat nozzle



P12348
DRY KIT Ø 50MM

Kit for cleaning large areas of dry dust that require high suction power. - 3-meter Evaflex hose - 2x antistatic rubber sleeves - Flat ...



P13640
DRY KIT Ø 40MM

Optimized configuration for thorough cleaning of floors and surfaces from dry dust. - 3-meter Evaflex hose - 1x 50/40 antistatic rubber ...



P13638
STARTER KIT Ø 40MM

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming