

HEAVY DUTY THREE-PHASE INDUSTRIAL VACUUM CLEANERS

ECOBULL PLUS

THREE-PHASE INDUSTRIAL VACUUM CLEANER



POWER
4 kW - 5,5 HP



APPLICATION
Powders, solids and shavings



CAPACITY
65Lt

FEATURES


- Powerful and reliable steel industrial vacuum cleaner
- Suitable for continuous work, 24 hours a day, 7 days a week
- Ability to vacuum dust, solids and liquids
- Multiple construction options available

HIGHLIGHTS



SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve to ensure continuous, maintenance-free operation. A metal silencer is included as standard in the turbine to ensure a low noise level.

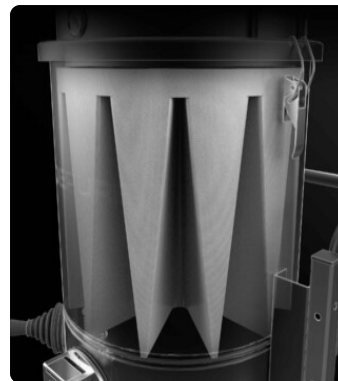

FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



COLLECTION UNIT

The material is collected inside a coated container complete with a handle that allows its release. Thanks to the 4 sturdy pivoting wheels, the container can be moved with ease, and the collected material can then be disposed of.

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	4 kW - 5,5 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	270 mBar
Maximum air flow	340 m3/h
Insulation class	55 F IP
Noise level	72 dB(A)

MACHINE

Suction inlet	70 Ø mm
Collection system	Steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1530 mm
Weight	95 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester
Filter Cleaning System	Manual

FEATURES



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE




PLUG

3-pin industrial plug



PUSH HANDLE



DEFLECTOR

Internal deflector to protect the filter



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



PRV

Pressure relief valve installed

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP
Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 3
Polyester filter cartridges, 9 m² filter surface



JC
Jet Clean

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT
Antistatic PTFE filter (M class EN
60335-2-69)



PTFE
PTFE Filter (M class EN 60335-2-69)



NOMEX
250° Celsius resistant filter



MTF
Teflon filter (M class EN 60335-2-69)



BFL
M class filter 38.000 cm²



ANT M
Antistatic filter (M class EN 60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



ATEX CERTIFICATION



PLUG
4-pole industrial plug



CYCLONIC EFFECT
Tangential inlet and cyclone installed
Tangential inlet + cyclone



SD
Sliding damper



LP
Endless Bag continuous roll collection system



KDP
Differential pressure KIT for bag



GRD
Grounding



FLT
Floater device



GX
Stainless steel bin and chamber AISI 304




BX
Stainless steel bin AISI 304



AB
Accessories basket



100 LT
100 Lt bin



CONTAINER EMPTYING KIT
System for easy container emptying using forklift lifting.

ACCESSORIES**P13970****ARTICULATED SUCTION ARM D70**

Flexible PVC suction arm, retrofittable on existing models - 1.2 mt length - d70

**P13638****STARTER KIT Ø 40MM**

Basic kit containing specific accessories for 40 mm diameter solids and liquids vacuuming

**P12350****STARTER KIT Ø 50MM**

Basic kit containing specific accessories for 50 mm diameter solids and liquids vacuuming

**P13639****WET & DRY KIT Ø 40MM**

Kit containing specific accessories for 40 mm diameter solids and liquids vacuuming

**P11887****WET & DRY KIT Ø 50MM**

Kit containing specific accessories for 50 mm diameter solids and liquids vacuuming

**P13640****DRY KIT Ø 40MM**

Kit containing specific accessories for 40 mm diameter dust and solids vacuuming

**P12348****DRY KIT Ø 50MM**

Kit containing specific accessories for 50 mm diameter dust and solids vacuuming