VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

# AS 150

## INDUSTRIAL VACUUM FOR TRIMS, PRODUCTION CUTTINGS AND WASTE

**POWER**
1,6 kW - 2,2 HP

**APPLICATION**
Bulky scraps and cuttings

**CAPACITY**
120 Lt

## FEATURES

- Suction of trims and bulky cuttings
- Large collection capacity
- Can be installed directly on production lines
- Window to check fill level

## HIGHLIGHTS

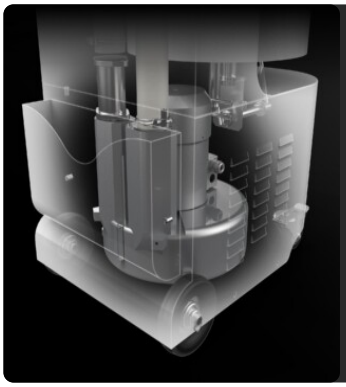

### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The turbine is equipped with a safety valve that ensures continuous, maintenance-free operation. A metal silencer is included as standard in the turbine to ensure a low noise level.

### FILTERING COLLECTION BAG

Polyester bag filter for material collection that compacts material to the bottom, thus enabling the suction of large amounts of material

### COLLECTION UNIT

The material is collected inside the large steel vacuum chamber, which is easy to move thanks to the 4 sturdy wheels.

### LEVEL INSPECTION DOOR

An inspection window allows inspection of the amount of material inside the container without having to open the top cover

## TECHNICAL DATA

### MOTOR

| | |
|---|---|
| **Typologies** | Side channel blower |
| **Power** | 1,6 kW - 2,2 HP |
| **Frequency** | 50/60 Hz |
| **Voltage** | 400 V |
| **Vacuum in continuous run** | 190 mBar |
| **Maximum air flow** | 280 m3/h |
| **Insulation class** | 55 \| F IP |
| **Noise level** | 64 dB(A) |

### MACHINE

| | |
|---|---|
| **Suction inlet** | 50 Ø mm |
| **Collection system** | Steel container |
| **Capacity** | 120 Lt |
| **Dimensions** | 510 x 590 mm |
| **Height** | 1440 mm |
| **Weight** | 66 Kg |
| **Safety valve** | Pressure relief valve |

### FILTRATION

| | |
|---|---|
| **Primary filter type** | Bag |
| **Media** | Polyester |

# FEATURES

### POWER SUPPLY CABLE

### PLUG
4-pole industrial plug

### WHEEL WITH BRAKE
Non-marking wheel with integrated brake

### WHEELS
Non-marking pivoting wheels

### STEEL CONSTRUCTION
Rugged industrial coated steel construction

### PRV
Pressure relief valve installed

# OPTIONS

## STRUCTURE AND OPTIONS

### 60HZ
Available in 60Hz version

### 3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



### GRD
Grounding

### TX
Stainless steel bin, chamber and frame AISI 304