

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

# UPF 040

## INDUSTRIAL VACUUM FOR INTEGRATION INTO THE PRODUCTION LINE



**POWER**  
0,4 kW - 0,5 HP



**APPLICATION**  
Powders, solids and  
shavings




**CAPACITY**  
10Lt

## FEATURES

- Constant recovery of production waste or residual dust
- Available in horizontal and vertical construction
- Compact, for installation in narrow places
- Easy to maintain

## HIGHLIGHTS

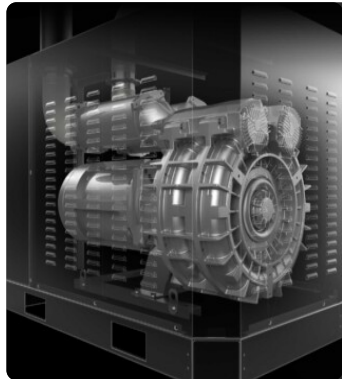


### SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve to ensure continuous, maintenance-free operation.



### FILTER UNIT

Filtration is provided by a Class M polyester bag filter (filtration efficiency 1 micron) with a high filtering surface area, which ensures air passage even with a dirty filter.

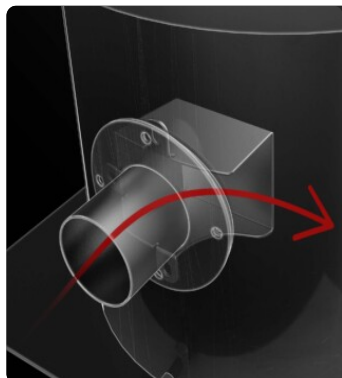

### INTERNAL DEFLECTOR

Sucked-in material is diverted by a deflector protecting the main filter.



### MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

## TECHNICAL DATA

### MOTOR

Typologies	Side channel blower
Power	0,4 kW - 0,5 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	125 mBar
Maximum air flow	80 m3/h
Insulation class	55   F IP
Noise level	64 dB(A)

### MACHINE

Suction inlet	50 Ø mm
Collection system	AISI304 stainless steel container
Capacity	10 Lt
Dimensions	410 x 730 mm
Height	350 mm
Weight	42 Kg
Safety valve	Pressure relief valve

### FILTRATION

Primary filter type	Bag
Filter surface	8000 cm2
EN 60335-2-69 filtration class	M
Media	Polyester

## OPTIONS

### STRUCTURE AND OPTIONS

**60<sup>✓</sup>Hz**

**60HZ**

Available in 60Hz version



**3 YEARS WARRANTY**

Purchasing the replacement filter along with the vacuum