

VACUUM CLEANERS FOR SCRAP, PACKAGING AND OEM

UPF 040 C

INDUSTRIAL VACUUM FOR MACHINERY INSTALLATION



POWER
0,4 kW - 0,5 HP



APPLICATION
Fine, dry and clogging
powders




CAPACITY
10Lt

FEATURES

- Constant recovery of scraps or fine dust, production residues
- Compact, for installation in narrow places
- Available in horizontal and vertical construction
- Easy to maintain

HIGHLIGHTS

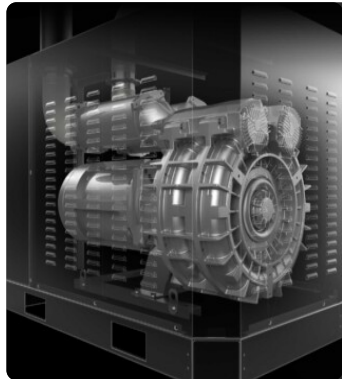


SUCTION UNIT

The suction unit is a side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve to ensure continuous, maintenance-free operation.



FILTER UNIT

Filtration is ensured by a Class M polyester cartridge filter (filtration efficiency 1 micron) with a high filtering surface area, which guarantees air passage even with a dirty filter.

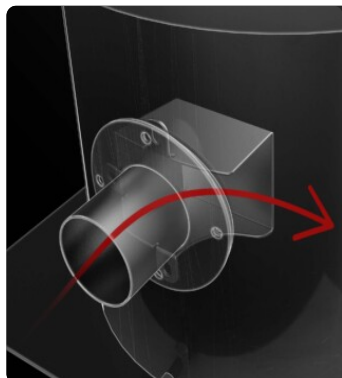

INTERNAL DEFLECTOR

Sucked-in material is diverted by a deflector protecting the main filter.



MODULARITY

The vacuum cleaner, designed to be installed in narrow or hard-to-reach places, is available in vertical or horizontal versions so as to adapt to different needs.

TECHNICAL DATA

MOTOR

Typologies	Side channel blower
Power	0,4 kW - 0,5 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	125 mBar
Maximum air flow	80 m3/h
Insulation class	55 F IP
Noise level	64 dB(A)

MACHINE

Suction inlet	50 Ø mm
Collection system	AISI304 stainless steel container
Capacity	10 Lt
Dimensions	410 x 730 mm
Height	350 mm
Weight	42 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Cartridge
Filter surface	10000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester

OPTIONS

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum