

ATEX AND ACD VACUUM CLEANERS

PUMA 10 DEX 1/3D

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POWER
7,5 kW - 10 HP



APPLICATION
Combustible dusts



CAPACITY
175 Lt

FEATURES


- Suitable and safe for intensive work in Atex 22 zones
- Maximum safety thanks to antistatic filtration and complete earthing
- Maximum power thanks to the Atex certified turbine
- Ideal for large centralized suction systems

HIGHLIGHTS



SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.

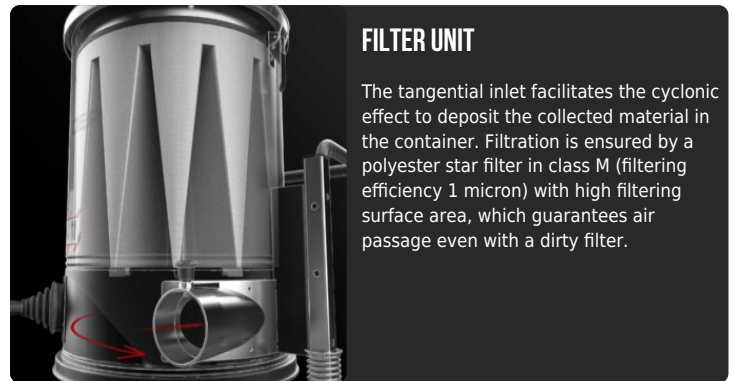

FILTER UNIT

The tangential inlet facilitates the cyclonic effect to deposit the collected material in the container. Filtration is ensured by a polyester star filter in class M (filtering efficiency 1 micron) with high filtering surface area, which guarantees air passage even with a dirty filter.



INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex 3D side channel blower
Power	7,5 kW - 10 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	280 mBar
Maximum air flow	700 m3/h
Insulation class	65 F IP
Noise level	74 dB(A)

MACHINE

Atex marking	II 1/3D Ex htc IIIC T140°C Da/Dc
EX category	1/3D
Operating temperature	-10/+40 C°
Suction inlet	100 Ø mm
Collection system	AISI304 stainless steel container
Capacity	175 Lt
Dimensions	850 x 1550 mm
Height	1980 mm
Weight	295 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	Star
Filter surface	45000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP

Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 4
Polyester filter cartridges, 12 m² filter surface

AVAILABLE FILTER MEDIA



HEPA 14

Absolute filter (EN 1822)
110.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT

Antistatic PTFE filter (M class EN
60335-2-69)

STRUCTURE AND OPTIONS

60^{Hz}

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



CONTAINER TILTABLE KIT
System for easy container emptying using forklift lifting.



FLAMELESS VENT
A valve that contains the flame and the overpressure generated by a possible explosion.



PANEL VENT FOR DIRECTIONAL EXPLOSION
An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.
Panel vent for explosion



FKL
Forklift bracket



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P14899
ANTISTATIC KIT Ø 70MM
Maximum efficiency and antistatic safety for removing large volumes of conductive material. - 5-meter antistatic PUR hose - 2x antistati ...