

ATEX AND ACD VACUUM CLEANERS

PUMA 10 SP DEX 1/2D

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POWER
7,5 kW - 10 HP



APPLICATION
Combustible dusts




CAPACITY
175 Lt

FEATURES


- Suitable and safe for intensive work in Atex 21 or 22 zones
- High efficiency antistatic filtration with integrated automatic cleaning system and grounding
- Maximum power thanks to the Atex certified blower
- Ideal for large centralized suction systems

HIGHLIGHTS

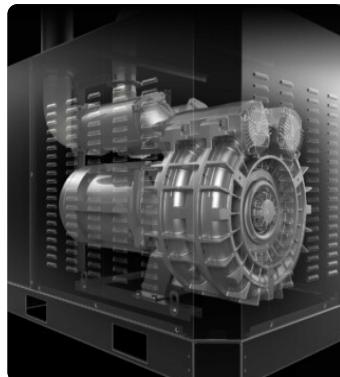

SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.

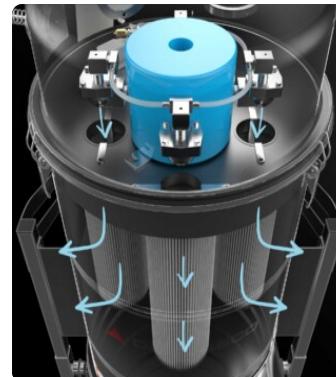

SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, alternately adjustable intervals without interrupting suction. Ideal for fine and difficult dust.



INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex 3D side channel blower
Power	7,5 kW - 10 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	280 mBar
Maximum air flow	700 m3/h
Insulation class	65 F IP
Noise level	74 dB(A)

MACHINE

Atex marking	II 1/2D Ex htc IIIC T140°C Da/Dc
EX category	1/2D
Operating temperature	-10/+40 C°
Suction inlet	100 Ø mm
Collection system	AISI304 stainless steel container
Capacity	175 Lt
Dimensions	850 x 1550 mm
Height	1980 mm
Weight	295 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	4x Cartridges
Filter surface	120000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Automatic SP
Secondary Absolute Filter	H14 - Included

FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER

Atex-certified vacuum cleaner with dry dust filtration, as per EN17348



HEPA 14

Absolute filter (EN 1822)



ELECTRICAL PANEL

Electrical panel, implementable with additional functions



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION

Antistatic filtration to discharge static energy



VACUUM GAUGE

Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



WHEEL WITH BRAKE

Non-marking wheel with integrated brake




WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



CYCLONIC EFFECT

Tangential inlet and cyclone installed



PRV

Pressure relief valve installed



GRD

Grounding



BX

Stainless steel bin AISI 304

OPTIONS

AVAILABLE FILTER CLEANING SYSTEMS



SP

Automatic reverse jet cleaning system
Antistatic M class filter (EN 60335-2-69), 4
Polyester filter cartridges, 12 m² filter surface

AVAILABLE FILTER MEDIA



PTFE ANT

Antistatic PTFE filter (M class EN
60335-2-69)

STRUCTURE AND OPTIONS

60 Hz

60Hz

Available in 60Hz version



3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



CONTAINER EMPTYING KIT

System for easy container emptying using forklift lifting.



FLAMELESS VENT

A valve that contains the flame and the overpressure generated by a possible explosion.



PANEL VENT FOR DIRECTIONAL EXPLOSION

An explosion vent designed to break at a specific pressure and release the explosive pressure in a safe area.
Panel vent for explosion



FKL

Forklift bracket



GX

Stainless steel bin and chamber AISI 304

ACCESSORIES



P14899

ANTISTATIC KIT Ø 70MM

Complete kit of antistatic accessories for vacuuming dust and solids with a diameter of 70 mm.