

ATEX AND ACD VACUUM CLEANERS

FOX 5,5 SP DEX 1/2D

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POWER
4 kW - 5,5 HP



APPLICATION
Combustible dusts




CAPACITY
100 Lt

FEATURES


- Suitable and safe for intensive work in Atex 21 zones
- ATEX certified blower
- Category 1D certified internal protection for maximum safety
- Progressive efficiency multistage anti-static filtration (up to H14) with integrated automatic cleaning system

HIGHLIGHTS

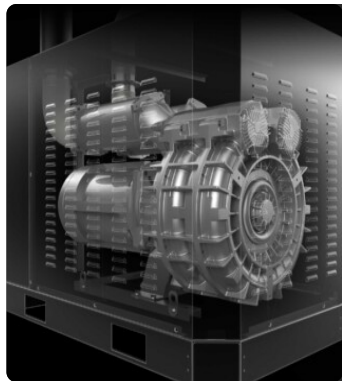

SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.

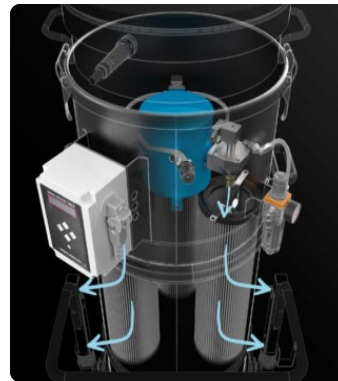

SP FILTER CLEANING SYSTEM

Automatic filter cleaning system in reverse flow of air at 6 bar (compressed air not supplied as standard). Each filter is cleaned at regular, adjustable intervals alternately without interrupting suction. Ideal for fine and difficult dust.



INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR

Typologies	Atex side channel blower
Power	4 kW - 5,5 HP
Frequency	50/60 Hz
Voltage	400 V
Vacuum in continuous run	230 mBar
Maximum air flow	450 m3/h
Insulation class	65 F IP
Noise level	73 dB(A)

MACHINE

Atex marking	II 1/2D Ex htc IIIC T140°C Da/Dc
EX category	1/2D
Operating temperature	-20/+40 C°
Suction inlet	80 Ø mm
Collection system	AISI304 stainless steel container
Capacity	100 Lt
Dimensions	660 x 1200 mm
Height	1860 mm
Weight	157 Kg
Safety valve	Pressure relief valve

FILTRATION

Primary filter type	3x Cartridges
Filter surface	90000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Automatic SP

FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER
Atex-certified vacuum cleaner with dry dust filtration, as per EN17348



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION
Antistatic filtration to discharge static energy



VACUUM GAUGE
Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction



CYCLONIC EFFECT
Tangential inlet and cyclone installed



PRV
Pressure relief valve installed



GRD
Grounding



BX
Stainless steel bin AISI 304



HEPA 14
Absolute filter (EN 1822)

OPTIONS

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



CONTAINER EMPTYING KIT
System for easy container emptying using forklift lifting.



SPARK TRAP
Built to capture sparks produced during welding, sanding, or polishing operations on metal parts



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P13641

ANTISTATIC STARTER KIT Ø 40MM

Basic kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P13642

ANTISTATIC KIT PRO Ø 40MM

Kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



P14901/EX

VERTIDEX – ATEX-CERTIFIED ACCESSORY KIT FOR CLEANING AT HEIGHT Ø 40MM



P12378

ANTISTATIC STARTER KIT Ø 50MM

Basic kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner



P12377

ANTISTATIC KIT PRO Ø 50MM

Kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner