

## ATEX AND ACD VACUUM CLEANERS

# DF 075 3GD Z2-22

## ATEX ZONE 2 CERTIFIED INDUSTRIAL DUST COLLECTOR



**POWER**  
0,75 kW - 1 HP



**APPLICATION**  
Volatile and suspended  
powders




**CAPACITY**  
65 Lt

## FEATURES


- Suitable and safe for vacuuming suspended dust in Atex 2 zones
- Atex-certified fan
- Extremely high airflow
- High filtration efficiency with complete grounding of the unit

## HIGHLIGHTS

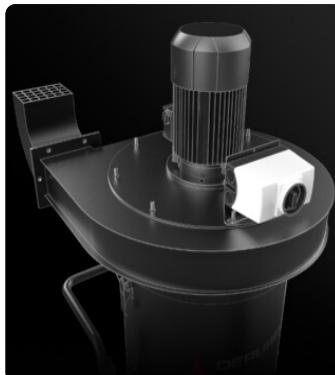

### SUCTION UNIT

Suction is generated by an Atex-certified electric fan specially designed to ensure the best air flow rate while maintaining a good vacuum level.

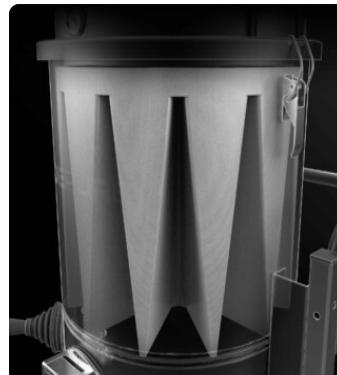

### FILTER UNIT

Filtration is provided by a polyester star filter in class M (filtration efficiency 1 micron) with a high filtering surface area, which guarantees the passage of air even with a dirty filter.



### FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the surface of the filter.



### COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

## TECHNICAL DATA

### MOTOR

Typologies	Electric Fan
Power	0,75 kW - 1 HP
Frequency	50/60 Hz
Voltage	400 V
Maximum vacuum mmH2O	185   200   180 mmH2O
Static depression level	180   192   170 mmH2O
Maximum air flow	300   600   800 m3/h
Insulation class	55   F IP
Noise level	65 dB(A)

### MACHINE

Atex marking	II 3GD Ex htc IIIB T140°C Gc/Dc
EX category	3GD
Operating temperature	-10/+40 C°
Suction inlet	70   100   120 Ø mm
Collection system	AISI304 stainless steel container
Capacity	65 Lt
Dimensions	660 x 800 mm
Height	1630 mm
Weight	110 Kg

### FILTRATION

Primary filter type	Star
Filter surface	24000 cm2
EN 60335-2-69 filtration class	M
Media	Antistatic polyester
Filter Cleaning System	Manual

## FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER

Atex-certified vacuum cleaner with dry dust filtration, as per EN17348



DEFLECTOR

Internal deflector to protect the filter



PUSH HANDLE



4-PIN ATEX INDUSTRIAL PLUG



ANTISTATIC FILTRATION

Antistatic filtration to discharge static energy



POWER SUPPLY CABLE



WHEEL WITH BRAKE

Non-marking wheel with integrated brake



WHEELS

Non-marking pivoting wheels



STEEL CONSTRUCTION

Rugged industrial coated steel construction



GRD

Grounding



BX

Stainless steel bin AISI 304

## OPTIONS

## AVAILABLE FILTER MEDIA

**HEPA 13**

Absolute filter (EN 1822)  
110.000 cm<sup>2</sup> filter surface  
H14 Class Filter (EN 1822)  
Glass fiber

**PTFE ANT**

Antistatic PTFE filter (M class EN 60335-2-69)

## AVAILABLE FILTER CLEANING SYSTEMS

**PSC**

Semiautomatic pneumatic filter shaker

## STRUCTURE AND OPTIONS

# 60 Hz

### 60Hz

Available in 60Hz version



### 3 YEARS WARRANTY

Purchasing the replacement filter along with the vacuum



### SLN

Silencer + diffusor



### GX

Stainless steel bin and chamber AISI 304



### 100 LT

100 Lt bin

## ACCESSORIES



### P12370

ATEX CERTIFIED STAINLESS STEEL SUCTION ARM Ø 150MM/ L 3M

150mm diameter suction arm jointed in three parts for a total length of 3 metres.  
Construction in AISI 316 stainless steel, completely condu ...



### P12300/100

FLANGED REDUCTION FOR HOSE Ø 100MM

Coupling flange on DF industrial vacuum for 100 mm diameter flexible hose



### P12300/120

FLANGED REDUCTION FOR HOSE Ø 120MM

Coupling flange on DF industrial vacuum for 120 mm diameter flexible hose



### P12300/150

FLANGED REDUCTION FOR HOSE Ø 150MM

Coupling flange on DF industrial vacuum for 150 mm diameter flexible hose